



ROHS

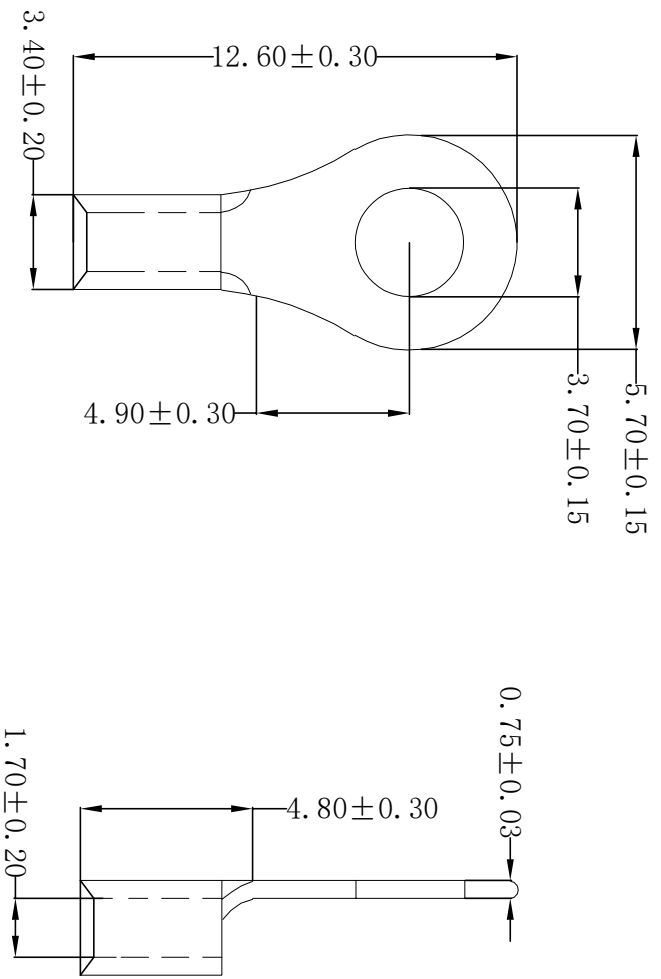

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm²
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: #6
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X ±0.35	DESIGN		---	UNIT	
					X.XX ±0.25	CHECK	Lisa	2016.06.06	SIZE	
					X.XXX ±0.15	APPROVE			SHEET	PART NO.
					Angle ±3°				1/1	SCTRRB1.25-3.5S141
					DIM				PROJ.	Terminal 370R copper Tin plated 0.5~1.5mm ² wire, ID:3.70mm OD:5.70mm
					TOL					