



ROHS

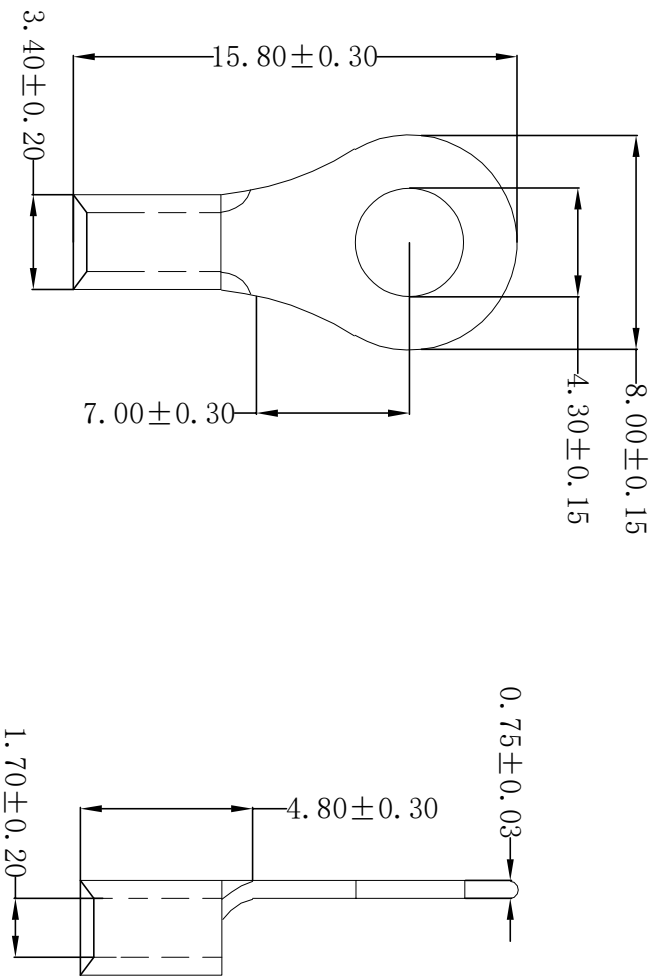

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm²
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: #8
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 SCONDAR ELECTRONIC LIMITED
A0	2016.06.06	NEW	—	—	X.X ±0.35	DESIGN		—		
					X.XX ±0.25	CHECK	Lisa	mm		
					X.XXX ±0.15	APPROVE		A4	SIZE	
					Angle ±3°			1/1	SHEET	PART NO.
					DIM			PROJ.		SCTRRB1.25-4L141
					TOL.					Terminal 430R copper Tin plated 0.5~1.5mm ² wire, ID:4.30mm OD:8.00mm MPQ=1K/tes