



ROHS

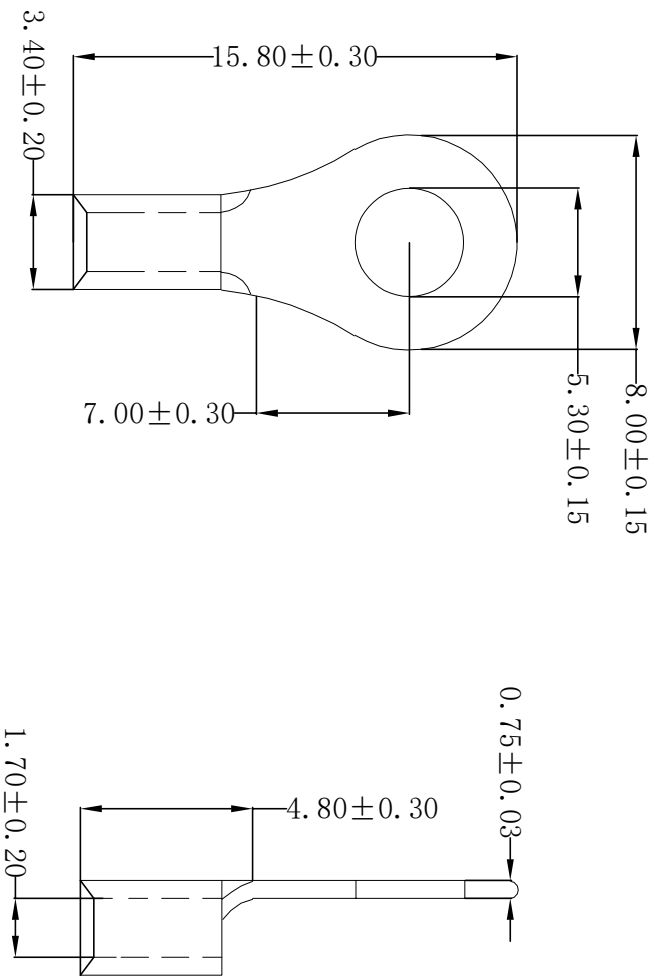

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm²
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: #10
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

| | | | | | | | | | | |
|-----|------------|--------------------------|--------|---------|----------------|---------|------|------------|----------|---|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | YANG | 2016.06.06 | SCALE |  <p>SCONDAR ELECTRONIC LIMITED</p> |
| A0 | 2016.06.06 | NEW | --- | --- | X.X ±0.35 | DESIGN | | --- | UNIT | |
| | | | | | X.XX ±0.25 | CHECK | Lisa | 1/1 | mm | |
| | | | | | X.XXX ±0.15 | APPROVE | | | SIZE | A4 |
| | | | | | Angle ±3° | | | | SHEET | 1/1 |
| | | | | | DIM | | | | PROJ. | |
| | | | | | TOL | | | | PART NO. | SCTRB1.25-5S141 |
| | | | | | | | | | TITLE: | Terminal 530R copper Tin plated 0.5~1.5mm ² wire, ID:5.30mm OD:8.00mm |