



ROHS

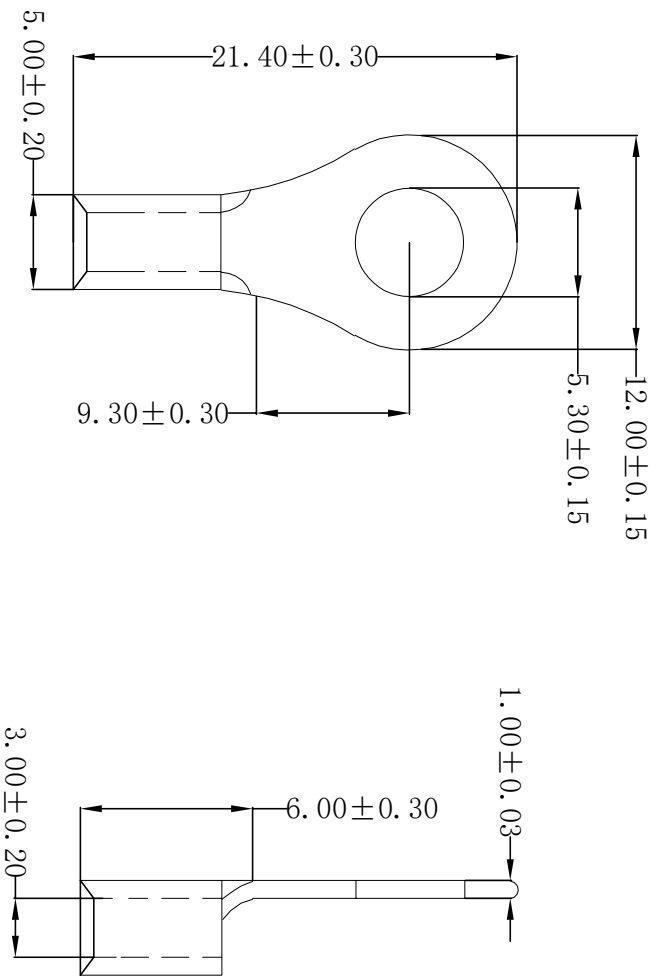

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 2.50~4.00mm²
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 37A
- USA Screw: #10
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X ±0.35	DESIGN			UNIT mm	
					X.XX ±0.25	CHECK	Lisa	2016.06.06	SIZE A4	
					X.XXX ±0.15	APPROVE			SHEET 1/1	PART NO. SCTRMB3.5-5L141
					Angle ±3°				PROJ.	Terminal 530R copper Tin plated 2.5~4.0mm ² wire, ID:5.30mm OD:12.00mm MPQ=1K/box
					DIM TOL					