


RoHS

### Ordering Information

FFC 050 E - xxP Lxxx S 0 -S3 401

Pitch 05=0.5mm      Model      No. of Pins See Table      Long L130=130mm      Coating G=Gold S=Tin      UL 0=NO-UL      Strip Length S3=3mm

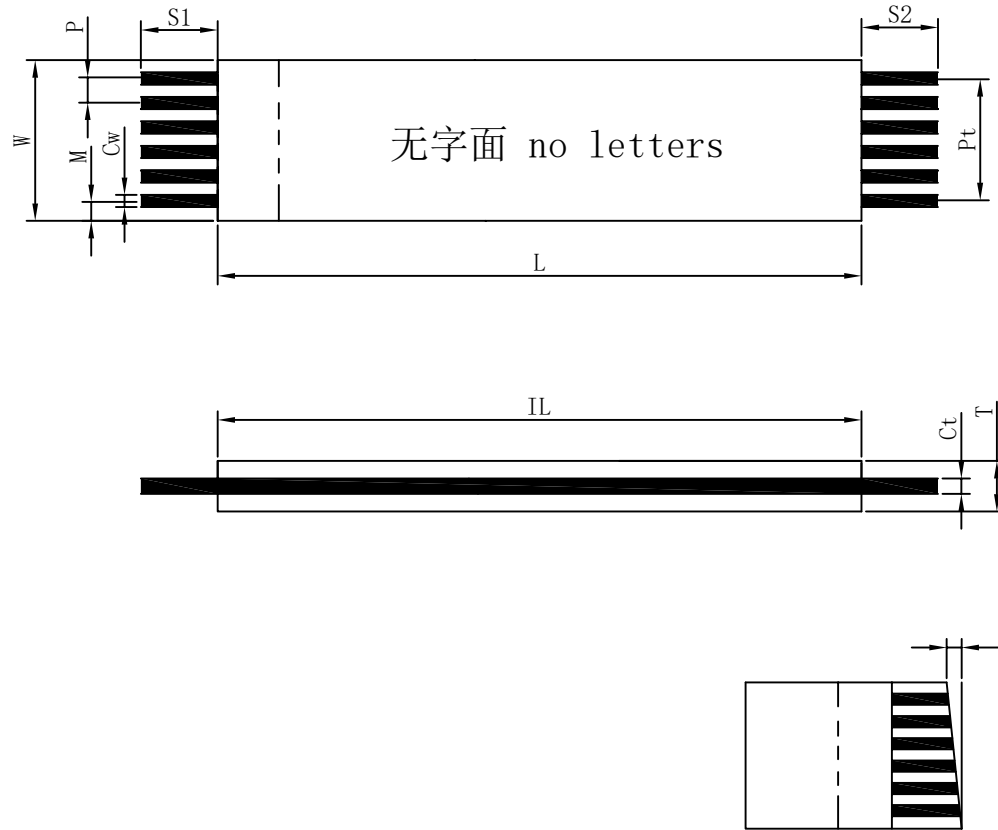

Item	项目		Specification 规格值
No. of conductors	导体芯数	N	3P-80P
Pith	间距	P	0.5±0.05
Total Pitch	全间距	Pt	0.5*(P-1)±0.08
Total Length	总长度	L	20-10000±(2-150)
Insulation Length	绝缘长度	IL	L-S1-S2±2.0
Margin Width	边缘宽度	M	0.5±0.08
Total Width	总宽度	W	0.5*(P+1)±0.08
Strip Length	线口长度	S1	3±0.5
Strip Length	线口长度	S2	3±0.5
Slanting	线口倾斜度	A	≤0.3
Slanting	线口倾斜度	B	/
No. Thickness insulation	线身厚度	T	0.186±0.030
Conductor thickness	导体厚度	Ct	0.1±0.005
Conductor width	导体宽度	Cw	0.3±0.03
PET (Insulation)	绝缘胶规格		0.043m(白膜)
PET (Insulation)	绝缘胶规格		0.043mm WT PET

		<b>SCONDAR ELECTRONIC LTD</b> <b>ENGINEER LIU APPROVED</b>				OPERATION	DRAW	Yao	2021.12.01	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
				X.X	±0.35	DESIGN	Xiong	2021.12.02	UNIT	mm				
				X.XX	±0.25		CHECK	Lisa	2021.12.04	SIZE	A4			
AO	2021.12.04	NEW				Angle					SHEET	1/1	PART NO.	FFC050ExxPLxxxS0-S3401
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	☯	TITLE:	0.5*(3P-80P)*(20-10000)*E 3/3/(0.1x0.3)43LT+43WT	