

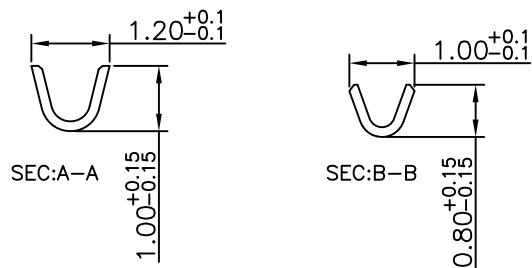


RoHS

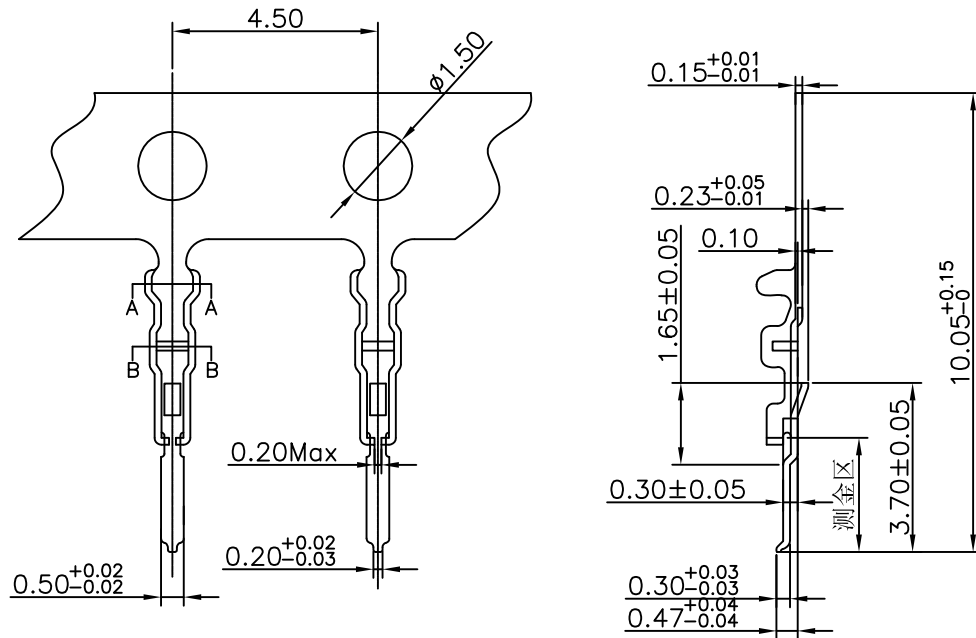

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:

- Applicable Wires: 28AWG~36AWG
- Material: Phosphor Bronze ,T=0.15mm
- Finish: Gold Plated

Ordering Information

SCT1005T P G 110

Material:
P=Phosphor Bronze Contact Plated
G=Gold Plated

受控

东莞市晟凯达电子科技有限公司
工程专用章

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.10	Changed from SCT1005TPG to SCT1005TPG110			X.XX ±0.25	CHECK	Lisa	2021.07.10	SIZE	A4		
AO	2009.03.03	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM TOL			PROJ.	⊕	PART NO.	SCT1005TPG110
											TITLE:	FI-X 1.0 Terminal