

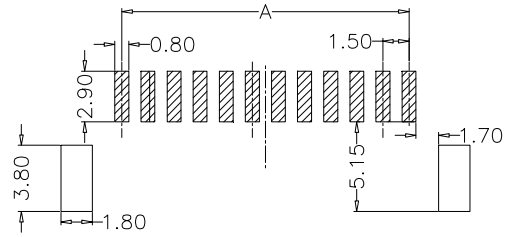
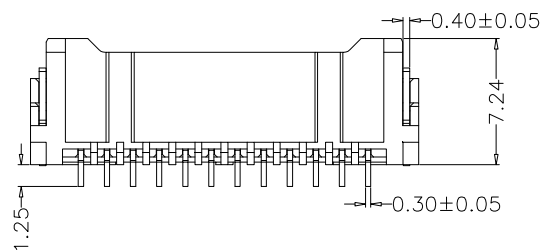

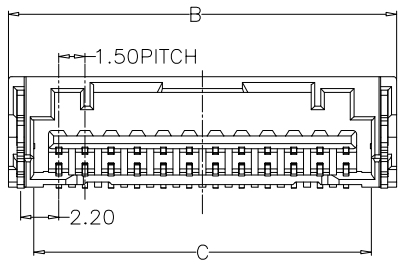



RoHS

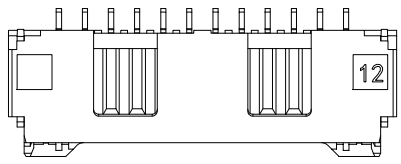


Recommended P.C.B. Layout
Total tolerance: ±0.05mm

2-5P



6-15P

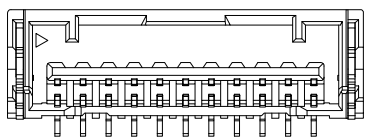

Specification:

- Current Rating: 1.5A AC/DC
 - Voltage Rating: 100V AC/DC
 - Insulation Resistance: 100MΩ Min
 - Withstanding Voltage: 500VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -25°C to +85°C
- Material:
- Insulator (Housing): PA9T (UL94V-0)
 - Color: Beige
 - Contacts: Brass/Tin Plated

Ordering Information

SCT1503WRS - xx E 1 BE 113

No. of Pins See Table Insulation E=PA9T V0 Package 1=Tape&Reel Color BE=Beige

Dimensions			Part NO	PIN
A	B	C		
1.50	7.30	4.40	SCT1503WRS-02E1BE113	2
3.00	8.80	5.90	SCT1503WRS-03E1BE113	3
4.50	10.30	7.40	SCT1503WRS-04E1BE113	4
6.00	11.80	8.90	SCT1503WRS-05E1BE113	5
7.50	13.30	10.40	SCT1503WRS-06E1BE113	6
9.00	14.80	11.90	SCT1503WRS-07E1BE113	7
10.50	16.30	13.40	SCT1503WRS-08E1BE113	8
12.00	17.80	14.90	SCT1503WRS-09E1BE113	9
13.50	19.30	16.40	SCT1503WRS-10E1BE113	10
15.00	20.80	17.90	SCT1503WRS-11E1BE113	11
16.50	22.30	19.40	SCT1503WRS-12E1BE113	12
18.00	23.80	20.90	SCT1503WRS-13E1BE113	13
19.50	25.30	22.40	SCT1503WRS-14E1BE113	14
21.00	26.80	23.90	SCT1503WRS-15E1BE113	15

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

OPERATION	DRAW	zhong	2019. 10. 12
X. X ±0.30	DESIGN	Lisa	2019. 10. 12
X. XX ±0.20			
X. XXX ±0.10	CHECK		
Angle ±3°	APPROVE		
DIM TOL			

SCONDAR
SCONDAR ELECTRONIC LIMITED

Part No. SCT1503WRS-xxE1BE113

TITLE: MX1.5mm XXP PA9T V0 Beige SMT WR Socket

A0		NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE