


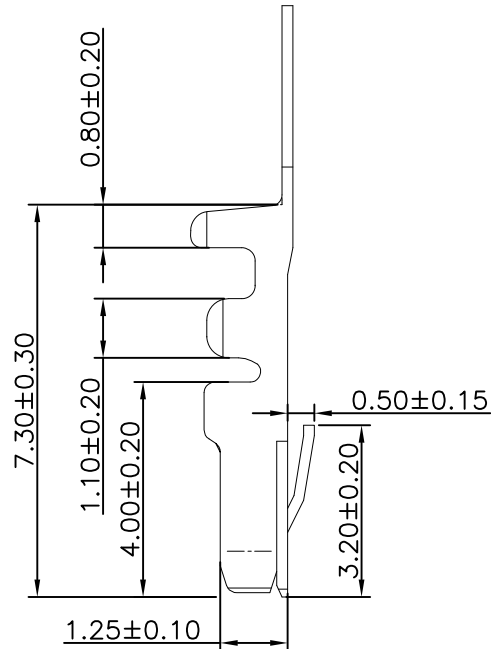


RoHS

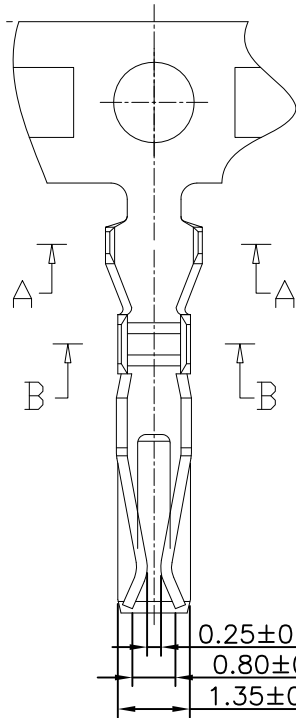

SECTION:A-A



SECTION:B-B

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C




Material:

- Wire Range: 24AWG~28AWG
- Insulation O.D: 1.5mm Max
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10000Pcs/Reel

Ordering Information

SCT2009T P S 101

Material:  
P=Phosphor Bronze S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25		CHECK	Lisa	2021.07.10	SIZE		A4	
A1	2021.07.10	Changed from SCT2009-TP to SCT2009TPS101			X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1	PART NO.	SCT2009TPS101	
AO	2015.03.03	NEW			Angle ± 3'				PROJ.		TITLE:	PHSD 2.0mm Terminal	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE								