

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 15mΩ(Max).
- After environmental testing: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Natural







Ordering Information

SCT2020H -2xx B NA 162


No. of Pins  
See Table

Insulation  
B=PA66 V0

Color  
NA=Natural

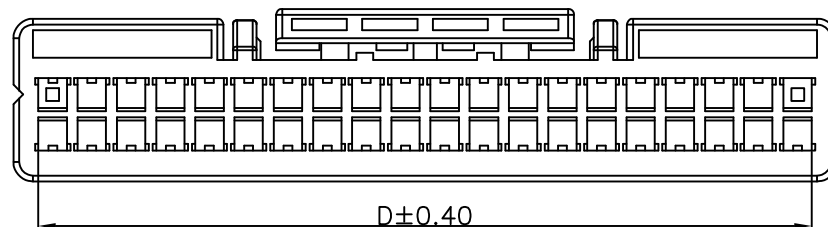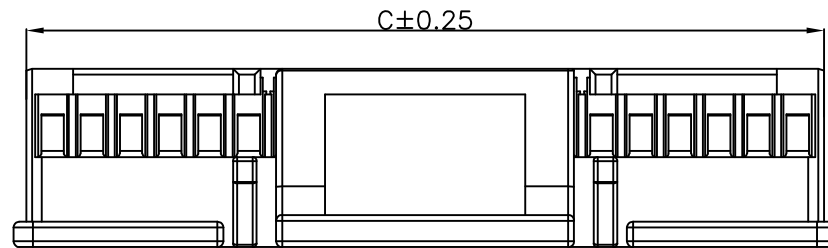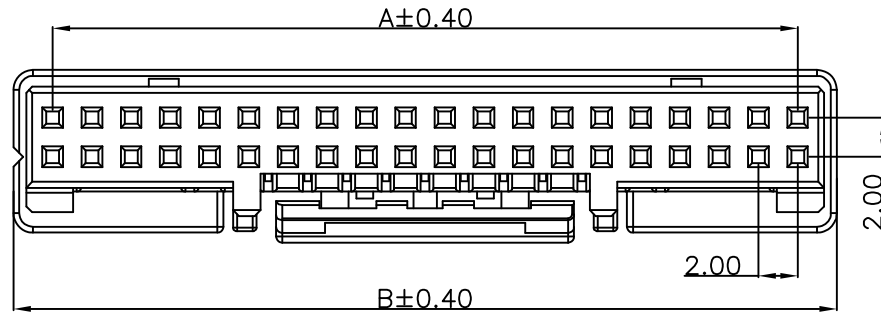

2*12	22.00	26.00	24.65	23.55						
2*11	20.00	24.00	22.65	21.55	2*20	38.00	42.00	40.65	39.55	
2*10	18.00	22.00	20.65	19.55	2*19	36.00	40.00	38.65	37.55	
2*9	16.00	20.00	18.65	17.55	2*18	34.00	38.00	36.65	35.55	
2*8	14.00	18.00	16.65	15.55	2*17	32.00	36.00	34.65	33.55	
2*7	12.00	16.00	14.65	13.55	2*16	30.00	34.00	32.65	31.55	
2*6	10.00	14.00	12.65	11.55	2*15	28.00	32.00	30.65	29.55	
2*5	8.00	12.00	10.65	9.55	2*14	26.00	30.00	28.65	27.55	
2*4	6.00	10.00	8.65	7.55	2*13	24.00	28.00	26.65	25.55	
Poles	A	B	C	D	Poles	A	B	C	D	
	Dimensions					Dimensions				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.03.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO	2021.03.15	NEW			X.X	±0.35	DESIGN		UNIT	mm		
					X.XX	±0.25	CHECK	Lisa	SIZE	A4		
					X.XXX	±0.15	APPROVE	Allen	SHEET	1/1		
					Angle	± 3'			PROJ.	⊕ ⊖	PART NO.	SCT2020H-2xxBNA162
					DIM	TOL					TITLE:	PUD 2.00mm Pitch Housing Connector