
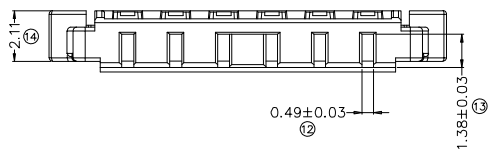


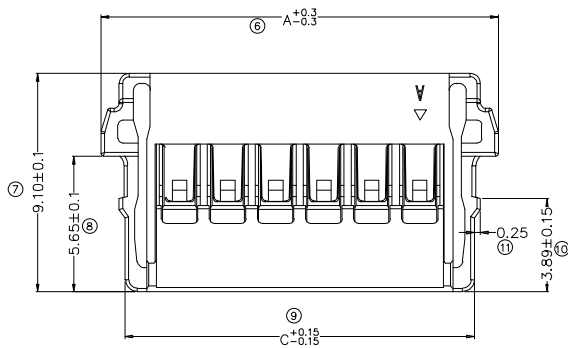




RoHS

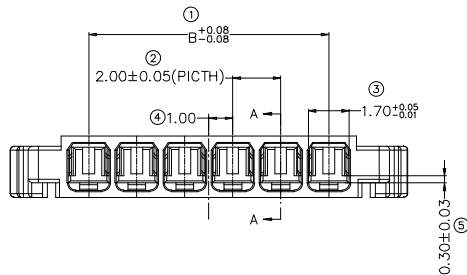

- Specifications(规格):
- Voltage rating(额定电压): 250V AC / DC
  - Current rating(额定电流): 6.5A AC / DC
  - Withstanding voltage(耐压值): 800V AC/minute
  - Temperature range(工作温度): -25° ~+85°C.
  - Insulation resistance(绝缘电阻): 1000M
  - Contact resistance(接触电阻): 20m
  - After environmental testing(环境测试后): 40m

- Housing (针座)
- Part No. (料号): SCT2027H
  - Poles (PIN数): 2-6
  - Material (材质): PA66 UL 94V-0

**Ordering Information**

SCT2027H - \*\* B 0 BK 184

No. of Pins See Table    Insulation B=PA66 V0    Package 0=Bag    Color BK=Black

Contacts	Dimensions(mm)			Q'ty/bag
	Dim A	Dim B	Dim c	
2	8.55	2	6.55	1000
3	10.55	4	8.55	1000
4	12.55	6	10.55	1000
5	14.55	8	12.55	1000
6	16.55	10	14.55	1000
7	18.55	12	16.55	1000
8	20.55	14	18.55	1000
9	22.55	16	20.55	1000
10	24.55	18	22.55	1000
11	26.55	20	24.55	1000
12	28.55	22	26.55	1000

SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

					OPERATION	DRAW	Zhong	2020.09.16	SCALE	—	<b>SCONDAR ELECTRONIC LIMITED</b>
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20				SIZE	A4	
A0	2020.09.16	NEW			X.XXX ±0.10	CHECK	Lisa	2020.09.16	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	◆	TITLE: 2.00mm Pitch Wire to Board Housing PA66 V0 Black
					DIM TOL						