

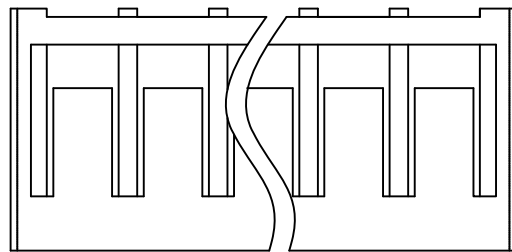
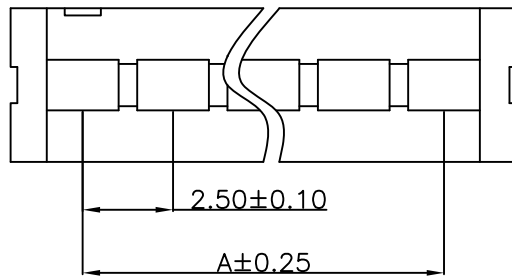


RoHS

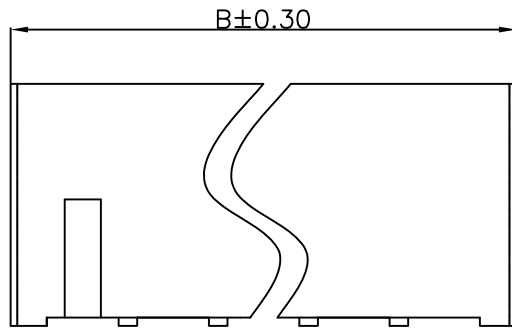

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +105°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0/2)
- Color: White
- Q'TY: 1000Pcs/Tape&Reel

Ordering Information

SCT2517HV - \*\* \* WT 126

No. of Pins See Table  
 Insulation B=PA66 V0 C=PA66 V2  
 Color WT=White

10	22.50	26.60	19	45.00	49.10
9	20.00	24.10	18	42.50	46.60
8	17.50	21.60	17	40.00	44.10
7	15.00	19.10	16	37.50	41.60
6	12.50	16.60	15	35.00	39.10
5	10.00	14.10	14	32.50	36.60
4	7.50	11.60	13	30.00	34.10
3	5.00	9.10	12	27.50	31.60
2	2.50	6.60	11	25.00	29.10
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.07	SCALE	-	SCONDAR ELECTRONIC LIMITED				
A1	2021.07.07	Changed from SCT2517HV-xxP to SCT2517HV-xxxWT126	---	---	X.X	±0.35	---	---	UNIT	mm	SCONDAR ELECTRONIC LIMITED				
AO	2009.10.15	NEW	---	---	X.XX	±0.25	Lisa	2021.07.07	SIZE	A4					
					X.XXX	±0.15	Allen	2021.07.07	SHEET	1/1	PART NO.	SCT2517HV-xxxWT126			
					Angle	± 3'			PROJ.	☉	TITLE:	SCN 2.50mm Pitch 180° Housing Connector			
					DIM	TOL									