
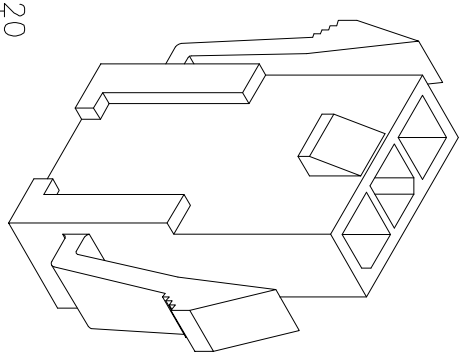
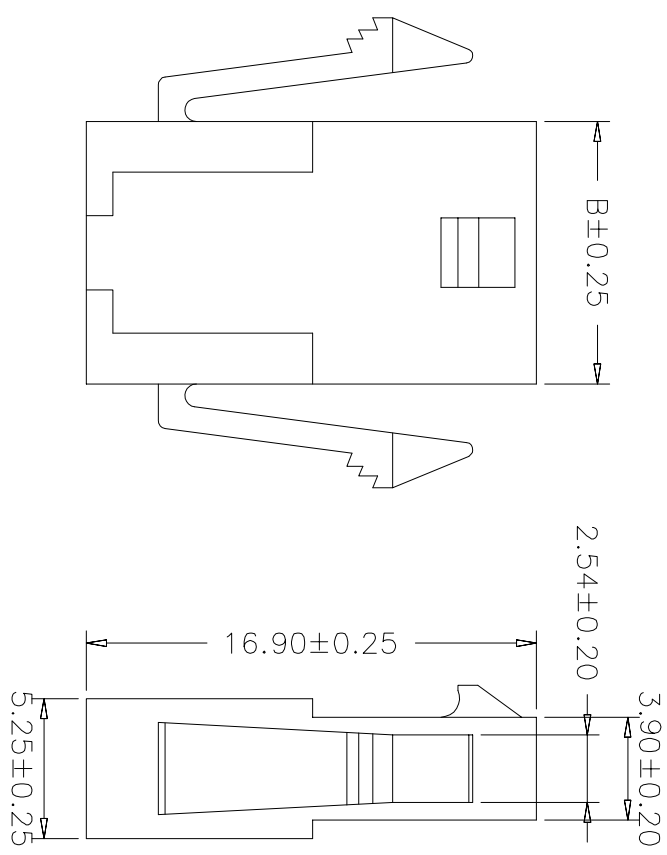


ROHS

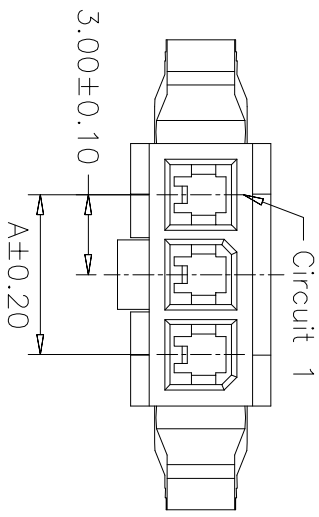

- Specification:**
- Current Rating: 5A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 1500VAC(1Min)
 - Contact resistance: 10mΩ(Max).
 - Operation Temperature: -25°C to +85°C
- Material:**
- Insulator (Housing): PA66 (UL94V-2)
 - Color: Black

Ordering Information

SCT3001FH - **XX** **C** **BK** 103

No. of Pins
See Table

Insulation
C=PA66 V2 BK=Black

Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
10	27.00	30.85			
9	24.00	27.85			
8	21.00	24.85			
7	18.00	21.85			
6	15.00	18.85			
5	12.00	15.85			
4	9.00	12.85			
3	6.00	9.85	12	33.00	
2	3.00	6.85	11	30.00	
				33.85	

OPERATION		DRAW		SCALE		TITLE:	
X.X	±0.35	DESIGN	Peng	UNIT	mm	SCONDAR	
X.XX	±0.25	CHECK	2019.10.15	SIZE	A4	SCONDAR ELECTRONIC LIMITED	
X.XXX	±0.15	APPROVE		SHEET	1/1	PART NO.	SCT3001FH-xxCBK103
Angle	± 3'			PROJ.		TITLE:	WX3.0 Female Housing Connector
DIM	TOL	APPROVE					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE			
A0	2019.10.15	NEW					



SCONDAR ELECTRONIC LIMITED