





RoHS

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 20mΩ(Max)

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: White

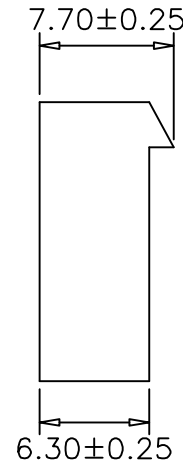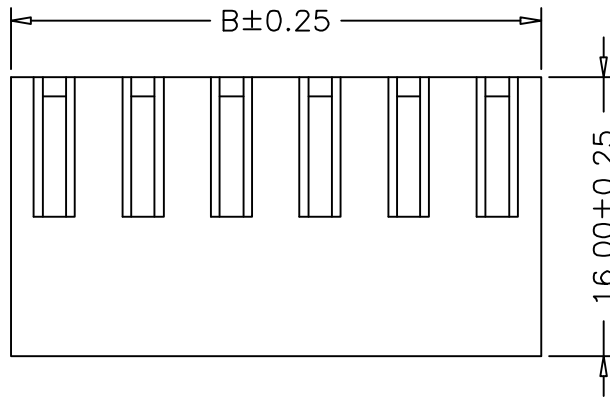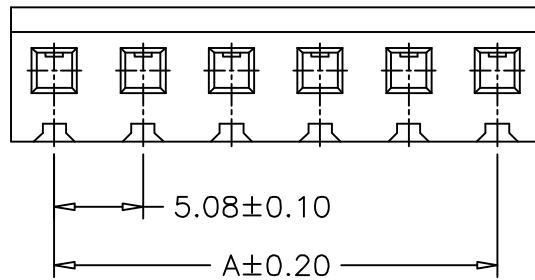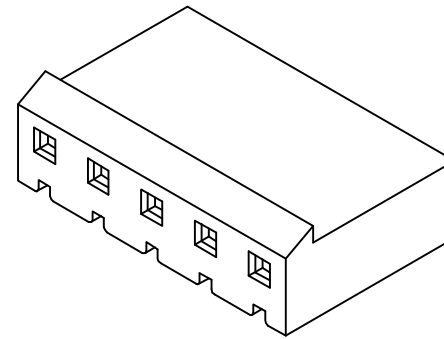

东莞市视讯达电子科技有限公司
工程专用章



受控

Ordering Information

SCT5080H - ** C WT 119

No.of Pins 02~20Pin Insulation C=PA66 V2 Color WT=White

9	40.64	45.64	17	81.28	86.28			
8	35.56	40.56	16	76.20	81.20			
7	30.48	35.48	15	71.12	76.12			
6	25.40	30.40	14	66.04	71.04			
5	20.32	25.32	13	60.96	65.96			
4	15.24	20.24	12	55.88	60.88	20	96.52	101.52
3	10.16	15.16	11	50.80	55.80	19	91.44	96.44
2	5.08	10.08	10	45.72	50.72	18	86.36	91.36
Poles	A B		Poles	A B		Poles	A B	
	Dimensions			Dimensions			Dimensions	

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.12	Changed from SCT5080H-xxP to SCT5080H-xxCWT119			X.XX ±0.25		CHECK	Lisa	2021.07.12	SIZE	
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.12	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PART NO.	SCT5080H-xxCWT119	
					Angle ± 3'				TITLE:	MX 5.80mm Pitch Housing Connector	
					DIM TOL						