
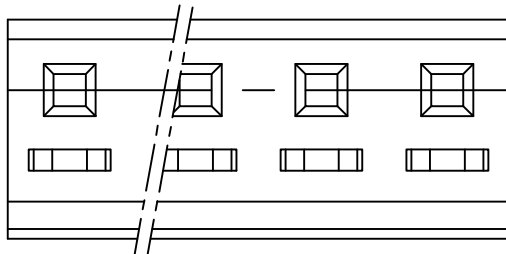
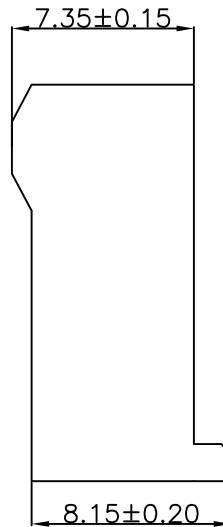


RoHS

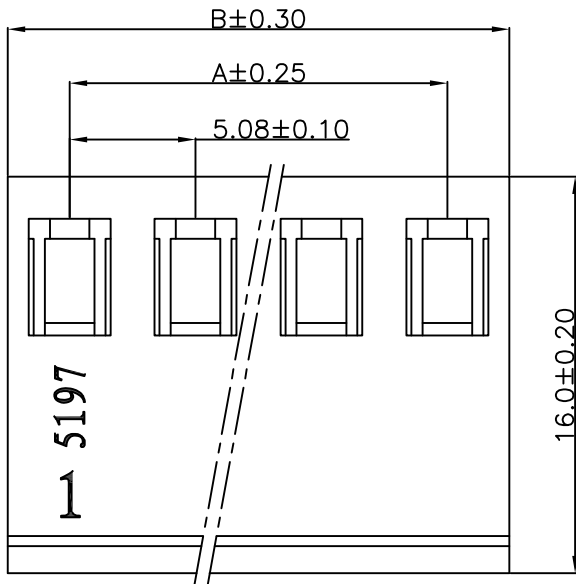

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 20mΩ(Max)

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: White

Ordering Information


SCT5082H - ** C WT 115

No.of Pins
02-09Pin

Insulation
C=PA66 V2

Color
WT=White

9	40.64	45.64
8	35.56	40.56
7	30.48	35.48
6	25.40	30.40
5	20.32	25.32
4	15.24	20.24
3	10.16	15.16
2	5.08	10.08
Poles	A	B
	Dimensions	

					OPERATION	DRAW	Peng	2021.07.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
AO	2021.07.03	NEW			X.XXX	±0.15			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	TITLE:	MX5197 5.80mm Pitch Housing Connector
					DIM	TOL	APPROVE					