


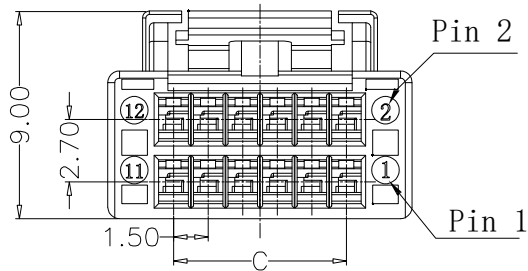


RoHS



Specification:

- Current Rating: 1.5~3A AC/DC
 - Voltage Rating: 100V AC/DC
 - Insulation Resistance: 500MΩ Min
 - Withstanding Voltage: 500VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PBT (UL94-V0)
 - Color: White

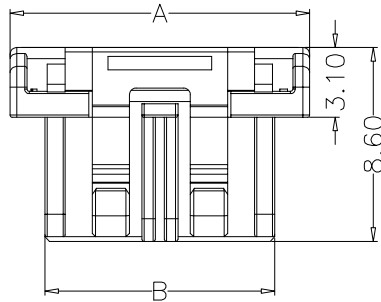


Ordering Information


SCT1503MH - 2xx D WT 113

No. of Pins See Table Insulation D=PBT V0 Color WT=White


Dimensions			PIN
A	B	C	
10.20	7.20	4.50	2x4
11.70	8.70	6.00	2x5
13.20	10.20	7.50	2x6
14.70	11.70	9.00	2x7
16.20	13.20	10.50	2x8
17.70	14.70	12.00	2x9
19.20	16.20	13.50	2x10
20.70	17.70	15.00	2x11
22.20	19.20	16.50	2x12
23.70	20.70	18.00	2x13
25.20	22.20	19.50	2x14
26.70	23.70	21.00	2x15
28.20	25.20	22.50	2x16
29.70	26.70	24.00	2x17
31.20	28.20	25.50	2x18
32.70	29.70	27.00	2x19
34.20	31.20	28.50	2x20



2x4-2x5P

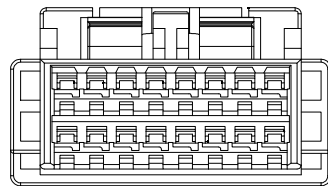

2x6-2x9P

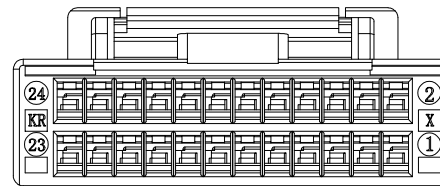

2x10-2x20P

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

					OPERATION	DRAW	Zhong	2019.08.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.30	DESIGN			UNIT	mm		
					X.XX ±0.20	CHECK	Lisa	2019.08.15	SIZE	A4		
A0					X.XXX ±0.10	APPROVE			SHEET	1/1 Part No.		SCT1503MH-2xxDWT113
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	⊕	TITLE:	Mx1.50mm 2XxxPin with lock Double row Housing PBT V0 White
					DIM TOL							