


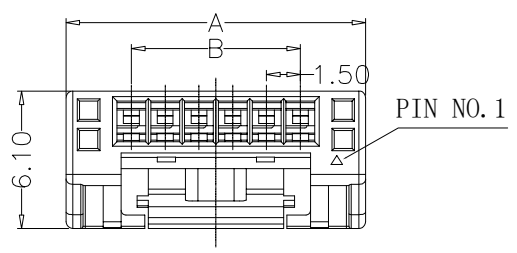


RoHS



Specification:


- Current Rating: 1.5~3A AC/DC
 - Voltage Rating: 100V AC/DC
 - Insulation Resistance: 500MΩ Min
 - Withstanding Voltage: 500VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PBT (UL94-V0)
 - Color: White

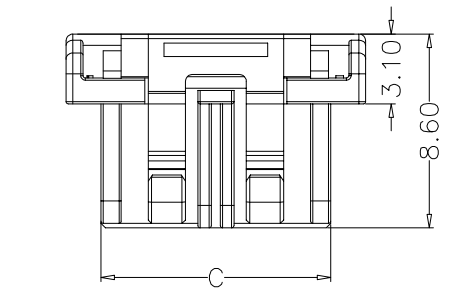

Ordering Information

SCT1503MH - xx D WT 113

No. of Pins See Table Insulation D=PBT V0 Color WT=White

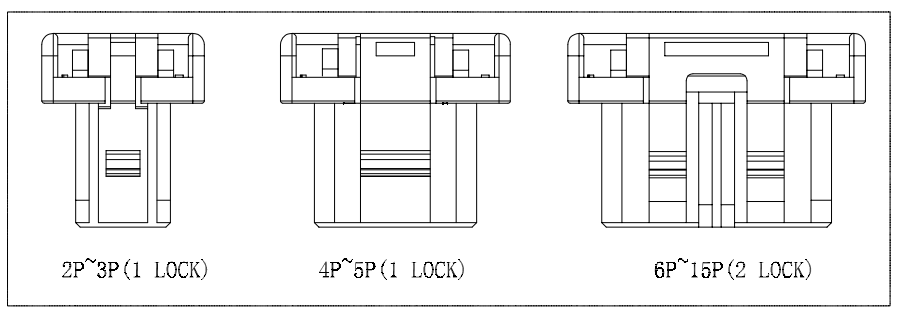

Dimensions			Part NO	PIN
A	B	C		
7.30	1.50	4.20	SCT1503MH-02DWT113	2
8.80	3.00	5.70	SCT1503MH-03DWT113	3
10.30	4.50	7.20	SCT1503MH-04DWT113	4
11.80	6.00	8.70	SCT1503MH-05DWT113	5
13.30	7.50	10.20	SCT1503MH-06DWT113	6
14.80	9.00	11.70	SCT1503MH-07DWT113	7
16.30	10.50	13.20	SCT1503MH-08DWT113	8
17.80	12.00	14.70	SCT1503MH-09DWT113	9
19.30	13.50	16.20	SCT1503MH-10DWT113	10
20.80	15.00	17.70	SCT1503MH-11DWT113	11
22.30	16.50	19.20	SCT1503MH-12DWT113	12
23.80	18.00	20.70	SCT1503MH-13DWT113	13
25.30	19.50	22.20	SCT1503MH-14DWT113	14
26.80	21.00	23.70	SCT1503MH-15DWT113	15

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

					OPERATION	DRAW	Zhong	2019.08.16	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20				SIZE	A4	
A0			NEW		X.XXX ±0.10	CHECK	Lisa	2019.08.16	SHEET	1/1 Part No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE			PROJ.	TITLE:	MX1.50mm XXPin with lock Single row Housing PBT V0 White