




RoHS






Specification:

- Current Rating: 1.5A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Insulator (Housing): PA9T (UL94V-0)
- Color: Beige
- Contacts: Brass/Tin Plated



Ordering Information


SCT1503WVS -2xx E 1 BE 113

No. of Pins See Table    Insulation E=PA9T V0    Package 1=Tape&Reel    Color BE=Beige

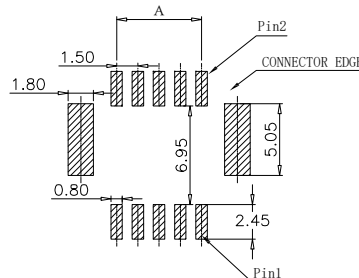


Recommended P.C.B. Layout  
Total tolerance: ±0.05mm


Dimensions			Part NO	PIN
A	B	C		
4.50	10.30	8.93	SCT1503WVS-204E1BE113	2x4
6.00	11.80	10.43	SCT1503WVS-205E1BE113	2x5
7.50	13.30	11.93	SCT1503WVS-206E1BE113	2x6
9.00	14.80	13.43	SCT1503WVS-207E1BE113	2x7
10.50	16.30	14.93	SCT1503WVS-208E1BE113	2x8
12.00	17.80	16.43	SCT1503WVS-209E1BE113	2x9
13.50	19.30	17.93	SCT1503WVS-210E1BE113	2x10
15.00	20.80	19.43	SCT1503WVS-211E1BE113	2x11
16.50	22.30	20.93	SCT1503WVS-212E1BE113	2x12
18.00	23.80	22.43	SCT1503WVS-213E1BE113	2x13
19.50	25.30	23.93	SCT1503WVS-214E1BE113	2x14
21.00	26.80	25.43	SCT1503WVS-215E1BE113	2x15
22.50	28.30	26.93	SCT1503WVS-216E1BE113	2x16
24.00	29.80	28.43	SCT1503WVS-217E1BE113	2x17
25.50	31.30	29.93	SCT1503WVS-218E1BE113	2x18
27.00	32.80	31.43	SCT1503WVS-219E1BE113	2x19
28.50	34.30	32.93	SCT1503WVS-220E1BE113	2x20




2X4-2X5P



2X6-2X9P



2X9-2X15P



2X16-2X20P

SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

A0	NEW				OPERATION	zhong	2019. 10. 12	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	X. X ±0.30			UNIT	mm		
					X. XX ±0.20			SIZE	A4		
					X. XXX ±0.10	Lisa	2019. 10. 12	SHEET	1/1		
					Angle ±3°			Part No.		SCT1503WVS-2xxE1BE113	
					DIM TOL			PROJ.	⌀	TITLE:	MX1.5mm 2XxxP PA9T V0 Beige SMT WV Socket