RoHS

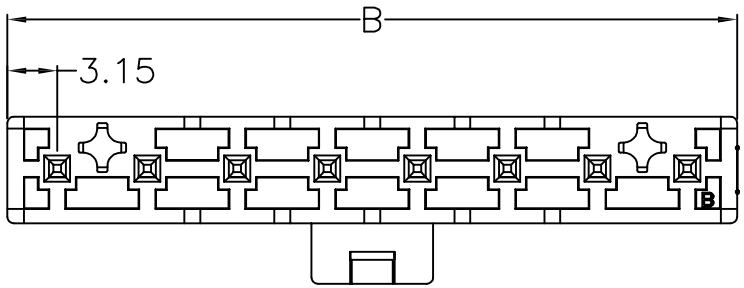

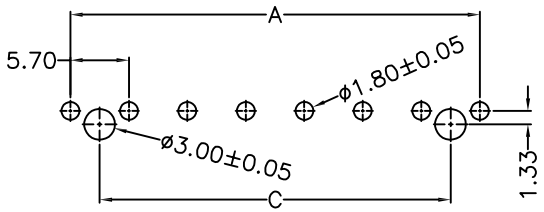

P B C board layout

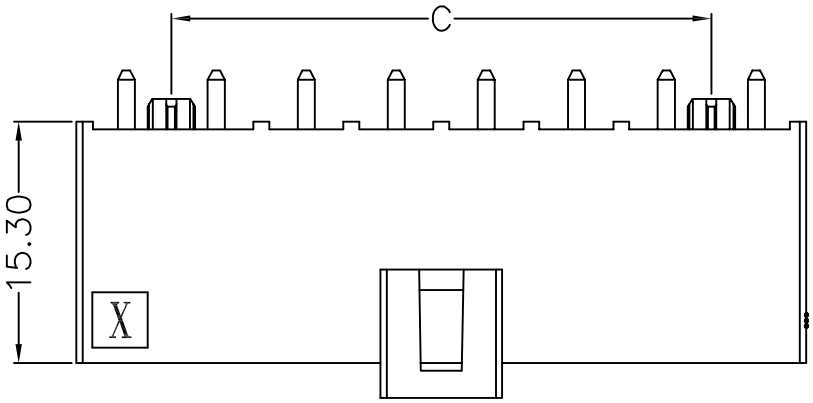

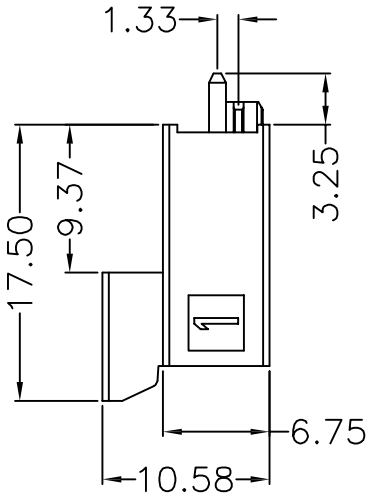

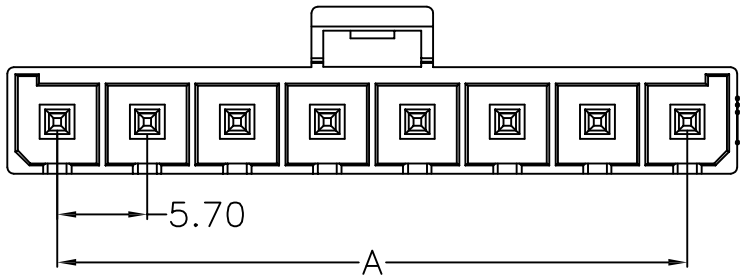

Specification:
- Voitage Rating: 600V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 2200VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -40℃ to +105℃

Material:
- Insulator (Housing): LCP (UL94V-0)
- Color: Black
- Material: Brass
- Finish: Tin Plating

Ordering Information

SCT5701WV -xx F 0 Black 173

- -xx: No.of Pins See Table
- F: Insulation F=LCP V0
- 0: Package 0=PE Bag
- Black: Color BK=Black

Dimensions			Part NO	PIN
A	B	C		
5.70	12.00	/	SCT5701WV-02F0BK173	2
11.40	17.70	5.70	SCT5701WV-03F0BK173	3
17.10	23.40	11.40	SCT5701WV-04F0BK173	4
22.80	29.10	17.10	SCT5701WV-05F0BK173	5
28.50	34.80	22.80	SCT5701WV-06F0BK173	6
34.20	40.50	28.50	SCT5701WV-07F0BK173	7
39.90	46.20	34.20	SCT5701WV-08F0BK173	8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	2016.06.06	NEW	———	———

OPERATION					
X.X	±0.30	DRAW	YANG	2016.06.06	SCALE —
X.XX	±0.20	DESIGN			UNIT mm
X.XXX	±0.10	CHECK	ZHONG	2016.06.06	SIZE A4
Angle	±3°				SHEET 1/1
DIM	TOL	APPROVE	Lisa	2016.06.06	PROJ.

SCONDAR ELECTRONIC LIMITED

Part NO. SCT5701WV-xxF0BK173

TITLE: 5.70mm Pitch DIP Single Row Vertical Through Hole PCB Header xxPin LCP V0 Black Tin(Sn) Plating PE Bag 3.25mm PC Tail Length MPQ=0.5KPcs