
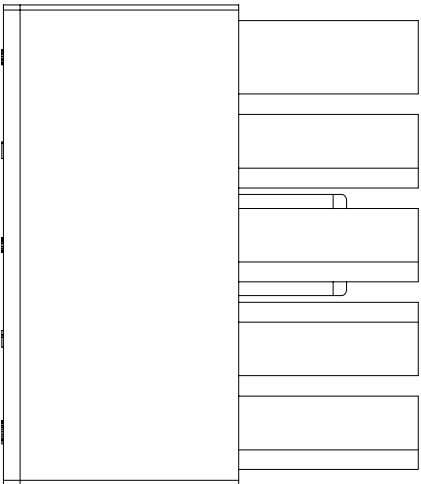


ROHS

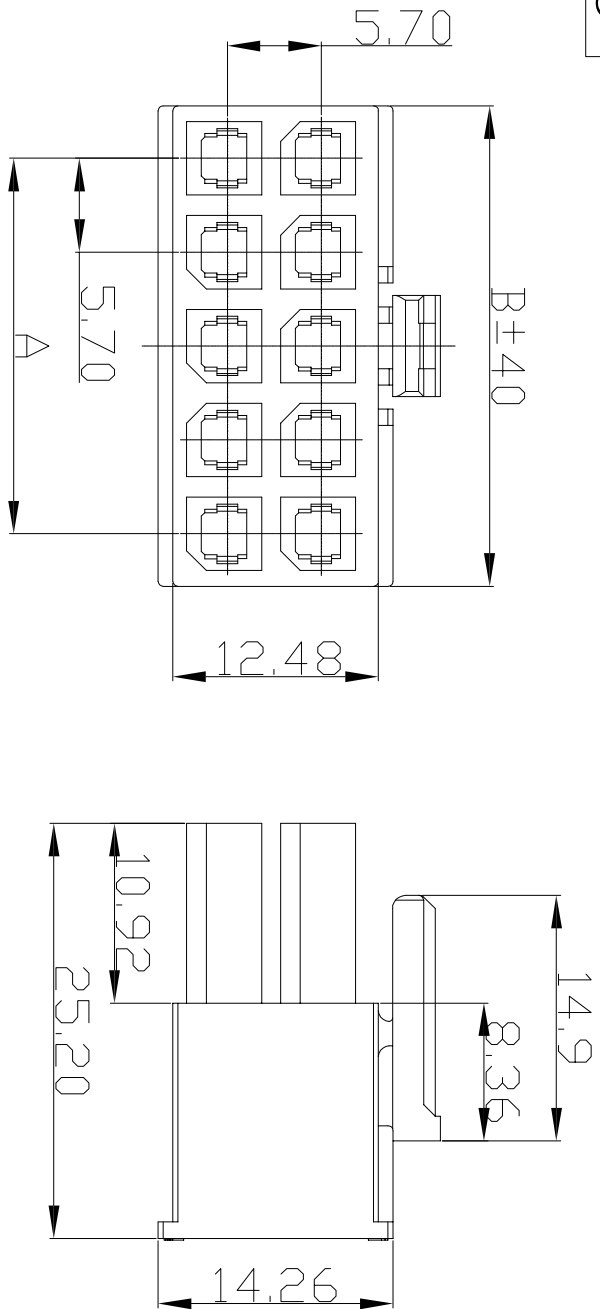

- Specification:
- Voltage Rating: 600V AC/DC
 - Insulation Resistance: 100MΩ Min
 - Withstanding Voltage: 2200VAC(1Min)
 - Contact resistance: 10mΩ(Max).
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing) : Nylon 66 (UL94V-0)
 - Color: Black

Ordering Information

SCT5702MH - 2xx B BK 173

Noof Pins Insulation Color
See Table B=PA66 V0 BK=Black

Dimensions		Part NO	PIN
A	B		
/	8.50	SCT5702MH-201B BK173	2*1
5.70	12.30	SCT5702MH-202B BK173	2*2
11.40	18.00	SCT5702MH-203B BK173	2*3
17.10	23.80	SCT5702MH-204B BK173	2*4
22.80	29.50	SCT5702MH-205B BK173	2*5
28.50	35.30	SCT5702MH-206B BK173	2*6



SCONDAR ELECTRONIC LIMITED

SCT5702MH-2xxB BK173

5.70mm Pitch Wire to Wire Male Housing 2xx Circuits PA66 V0
Black WPC=18Pcs

OPERATION	DRAW	ZUO	2016.06.06	SCALE	—
X.X	DESIGN			UNIT	mm
X.XX	CHECK	ZHONG	2016.06.06	SIZE	A4
X.XXX	APPROVE	Lisa	2016.06.06	SHEET	1/1
Angle				PROJ.	
±0.30					
±0.20					
±0.10					
±3°					
DIM					
TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	APPROVE	DATE	PROJ.	TITLE:
A0	2016.06.06	NEW							Part No.
1									5.70mm Pitch Wire to Wire Male Housing 2xx Circuits PA66 V0 Black WPC=18Pcs