



1 2 3 4 5 6 7 8 9 10

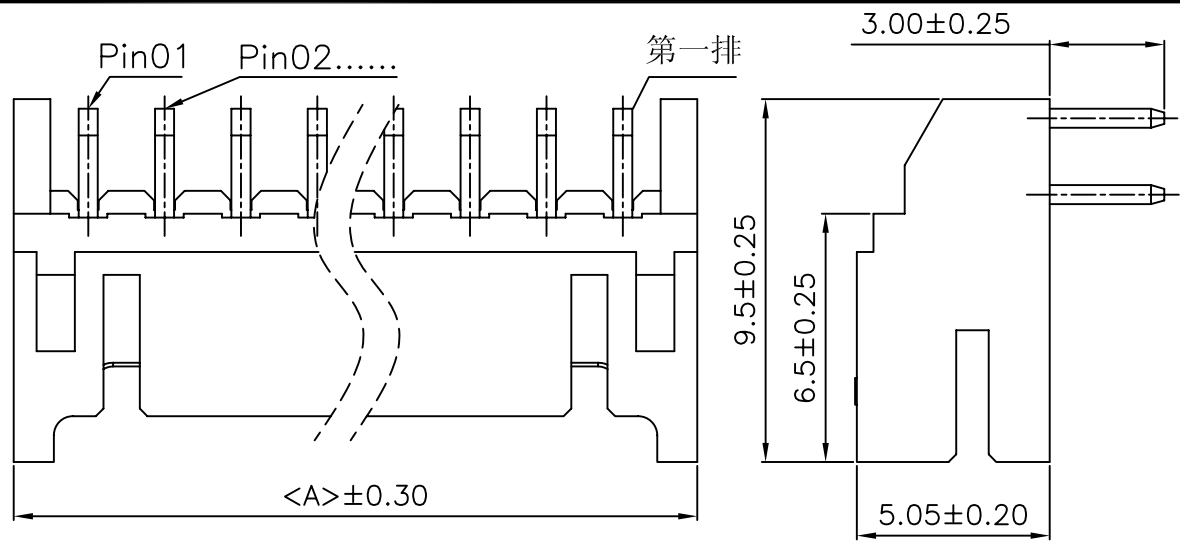

NOTES:

PART NO. : SCT2004WR-2XNP
 Current Rating: 2A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25° C ~ +85° C
 Contact Resistance: 20m max
 Insulation Resistance: 1000M min
 Withstanding Voltage: 800V AC/minute
 Material: PA66 UL 94V-0

PART NO.	Dimensions	
	A	B
SCT2004-WR-2X3PB	8.00	4.00
SCT2004-WR-2X4PB	10.00	6.00
SCT2004-WR-2X5PB	12.00	8.00
SCT2004-WR-2X6PB	14.00	10.00
SCT2004-WR-2X7PB	16.00	12.00
SCT2004-WR-2X8PB	18.00	14.00
SCT2004-WR-2X9PB	20.00	16.00
SCT2004-WR-2X10PB	22.00	18.00
SCT2004-WR-2X11PB	24.00	20.00
SCT2004-WR-2X12PB	26.00	22.00
SCT2004-WR-2X13PB	28.00	24.00
SCT2004-WR-2X14PB	30.00	26.00
SCT2004-WR-2X15PB	32.00	28.00
SCT2004-WR-2X16PB	34.00	30.00
SCT2004-WR-2X17PB	36.00	32.00

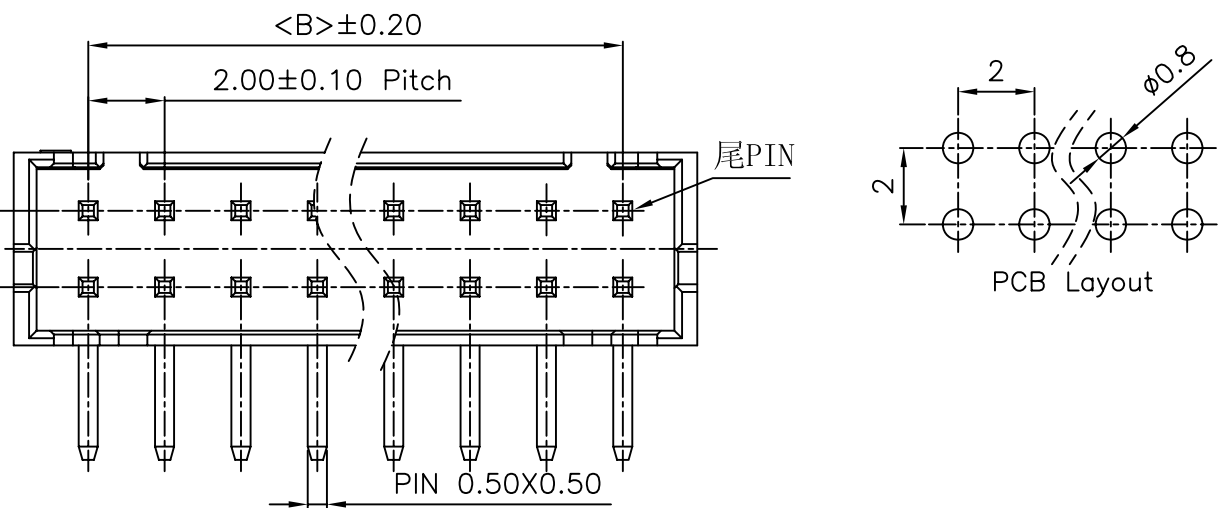

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	SCONDAR	
					~ 10 ±0.15			UNIT	森康达电子有限公司
					20 ~ 30 ±0.30	DESIGN		mm	
0	05/12/27	NEW			30 ~ ±0.50	CHECK		A4	PART NO. SCT2004WR-2xXXPB
					Angle ± 2'	APPROVE		1/1	TITLE: PHD2.0 90C WAFER
					DIM TOL			PROJ.	DRAWING NO. SCT2004WR

1 2 3 4 5 6 7 8 9 10