
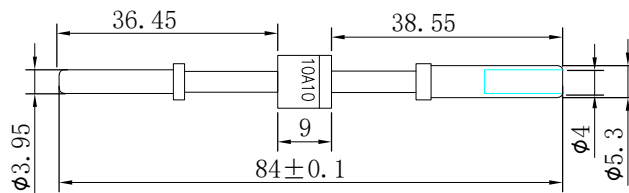
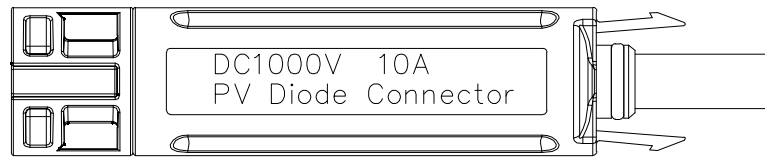


RoHS

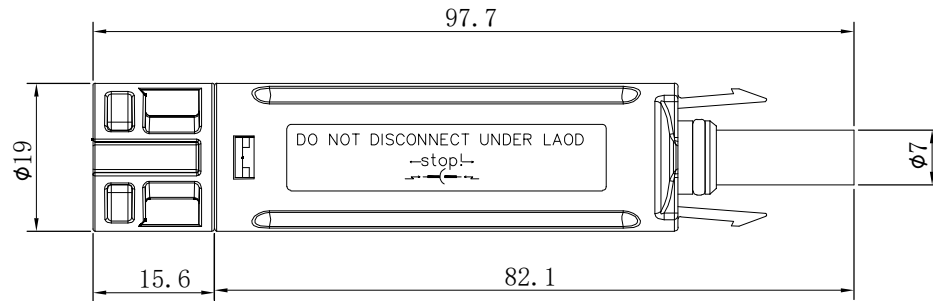



Technical parameters:

Rated voltage: 1000V
 Insulation material: ppo
 Conductor material: copper tin plating
 Ambient temperature: - 40° C ~+95° C
 Product temperature resistance: - 40° C ~+135° C
 Safety level: DCII
 Waterproof grade: IP68
 Contact resistance: $\leq 0.5m\Omega$
 Connecting systems: multipoint connections
 Self locking system: embedded
 Pull out force: $\Rightarrow 50$
 Insertion force: ≤ 50
 Rated current: 10A 15A 20A 30A
 Flame retardant grade: UL94-V0
 Plastic unmarked tolerance: ± 0.5

ordering information

SCT PE - V1 XX 2 01 641

Type voltage current Entrance and exit Shape Series
 V1=1000V 10=10A 2=2PASS
 15=15A
 20=20A
 30=30A

						OPERATION	DRAW	Yang	2020.05.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X	± 0.35			UNIT	mm		
						X.XX	± 0.25			SIZE	A4		
						X.XXX	± 0.15			SHEET	1/1		
A0	2020.03.03		NEW			Angle	$\pm 3'$			PART NO.		SCTPE-V1XX201641	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.		TITLE:	Diode voltage: 1000V, current: XA