
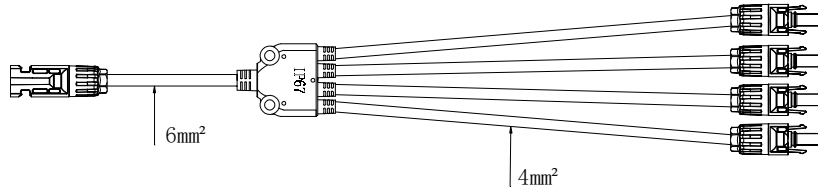


RoHS

Technical parameters:

Rated voltage: 1000v
 Insulation material: ppo
 Conductor material: copper tin plating
 Ambient temperature: - 40° ~+95°
 Product temperature resistance: - 40° ~+135°
 Safety level: DCII
 Waterproof grade: IP67
 Contact resistance: <=0.5mΩ
 Connecting systems: multipoint connections
 Self locking system: embedded
 Wiring mode: crimping
 Wiring specification: 4mm² 6mm²
 Rated current: 30A
 Flame retardant grade: UL94-V0
 Plastic unmarked tolerance: ±0.5

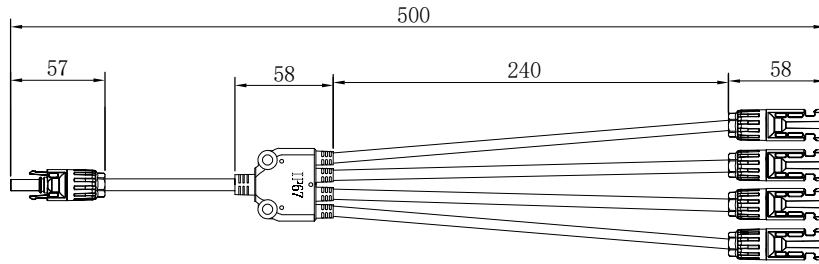

ordering information

SCT PY - V1 30 5 01 641
 Y Type voltage current Entrance Shape Series
 V1=1000V 30=30A and exit
 5=5PASS

受控

东莞市晟凯达电子科技有限公司
 工程专用章

					OPERATION	DRAW	Yang	2020.05.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25	CHECK	Lisa	2020.05.03	SIZE	A4		
					X.XXX ±0.15	APPROVE			SHEET	1/1		
AO	2020.03.03	NEW			Angle ± 3'				PROJ.	⊕	PART NO.	SCTPY-V130501641
REV	DATE	MODIFICATION DESCRIPTION			DIM TOL	APPROVE					TITLE:	PV through voltage: 1000V, current: 30A