
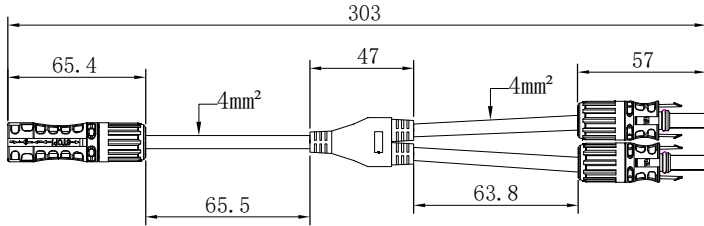


RoHS

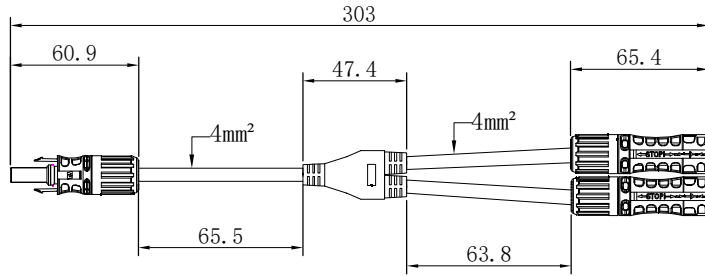

Technical parameters:

- Rated voltage: 1500v
- Insulation material: ppo
- Conductor material: copper tin plating
- Ambient temperature: - 40° ~+95°
- Product temperature resistance: - 40° ~+135°
- Safety level: DCII
- Waterproof grade: IP68
- Contact resistance: <=0.5mΩ
- Connecting systems: multipoint connections
- Self locking system: embedded
- Wiring mode: crimping
- Wiring specification: 4mm²
- Rated current: 30A
- Flame retardant grade: UL94-V0
- Plastic unmarked tolerance: ±0.5

SCT PY - V2 30 3 01 641
 Y Type voltage current Entrance Shape Series
 V2=1500V 300=30A and exit
 3=3PASS

东莞市晟凯达电子科技有限公司
 工程专用章

受控

						OPERATION	DRAW	Yang	2020.05.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
						X.XX ±0.25	CHECK	Lisa	2020.05.03	SIZE	A4		
AO	2020.03.03	NEW				X.XXX ±0.15	APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle ± 3'				PROJ.		TITLE:	PV through voltage: 1500V, current: 30A