



RoHS

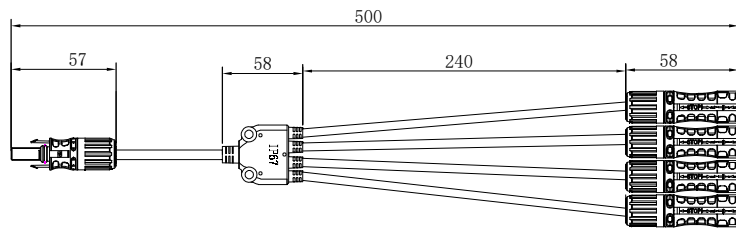

Technical parameters:


- Rated voltage: 1500V
- Insulation material: ppo
- Conductor material: copper tin plating
- Ambient temperature: - 40° C ~+95° C
- Product temperature resistance: - 40° C~+135° C
- Safety level: DCII
- Waterproof grade: IP67
- Contact resistance: <=0.5mΩ
- Connecting systems: multipoint connections
- Self locking system: embedded
- Wiring mode: crimping
- Wiring specification: 4mm²
- Rated current: 30A
- Flame retardant grade: UL94-V0
- Plastic unmarked tolerance: ±0.5

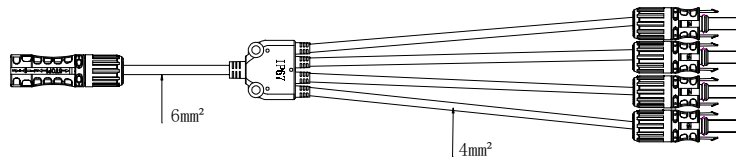

东莞市晟凯达电子科技有限公司
工程专用章

受控

SCT PY - V2 30 5 01 641
 Y Type voltage current Entrance Shape Series
 V2=1500V 300=30A 5=5PASS

						OPERATION	DRAW	Yang	2020.05.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
						X.X ±0.35	DESIGN			UNIT	mm			
						X.XX ±0.25	CHECK	Lisa	2020.05.03	SIZE	A4			
AO	2020.03.03		NEW			X.XXX ±0.15	APPROVE			SHEET	1/1	PART NO.	SCTPY-V230501641	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3°				PROJ.	☞	TITLE:	PV through voltage: 1500V, current: 30A	
						DIM TOL								