

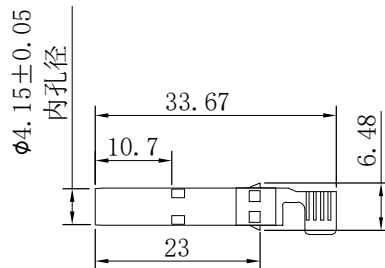

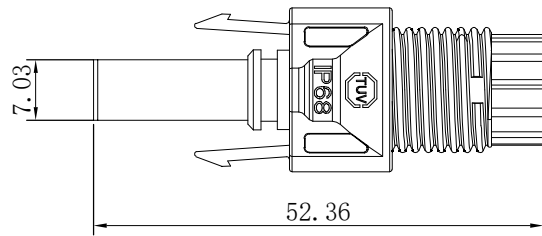



RoHS

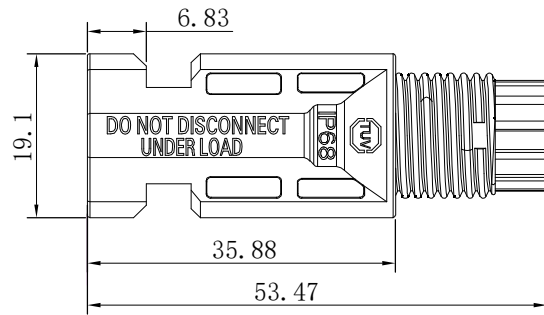

Technical parameters:


Rated voltage: 1000V
 Insulation material: ppo
 Conductor material: copper tin plating
 Ambient temperature: - 40° C ~+95° C
 Product temperature resistance: - 40° C~+135° C
 Safety level: DCII
 Waterproof grade: IP68
 Contact resistance: <=0.5mΩ
 Connecting systems: multipoint connections
 Self locking system: embedded
 Wiring mode: crimping
 Wiring specification: 2.5mm² 4mm² 6mm²
 Rated current: 17A(1.5mm²) 22A (2.5mm²)
 30A(4mm² ~ 6mm²)
 Flame retardant grade: UL94-V0
 Colore:RED
 Plastic unmarked tolerance: ±0.5
 Terminal unmarked tolerance: ±0.2

受控

东莞市晟凯达电子科技有限公司
 工程专用章

ordering information

SCT PZ - V1 XX 2 01 641-RD
 - Type voltage current Entrance and exit Shape Series RD=Red
 V1=1000V 17=17A 25=25A 30=30A
 2=2PASS

						OPERATION	DRAW	Yang	2020.05.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
						X.XX ±0.25	CHECK	Lisa	2020.05.03	SIZE	A4		
						X.XXX ±0.15	APPROVE			SHEET	1/1		PART NO. SCTPZ-V1XX201641-RD
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 3'				PROJ.	⊕	TITLE:	PV through voltage: 1000V, current: xA
						DIM TOL							