
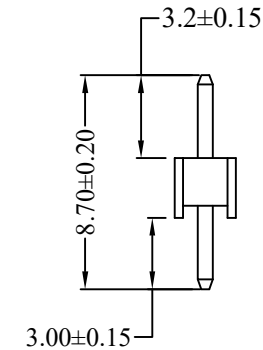
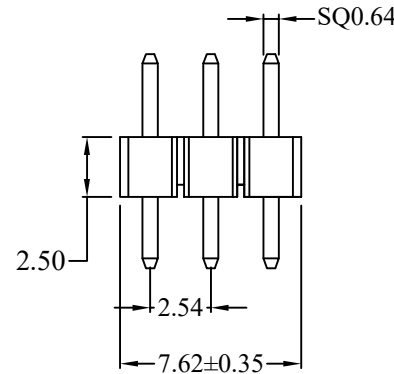




RoHS

Specifications:

- Current rating: 3A,AC/DC
- Withstanding Voltage: 550V AC/minute
- Insulation Resistance: 1000MΩ Min
- Temperature Range: -40°C ~ +105°C
- Soldering Temperature: 220°C 10S Max
- Contact Material: Brass
- Insulator Material: PA6T

P.C.B LAYOUT

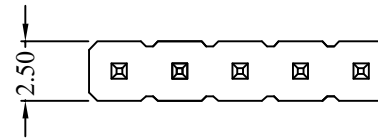

					OPERATION	DRAW	Peng	2021.03.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2022.06.13	Change PA3.5mm to PA3.2±0.15mm	Yang	Lisa	X.XX ±0.25	CHECK	Lisa	2022.06.13	SIZE	A4		
A0	2021.03.03	NEW	---	---	X.XXX ±0.15	APPROVE			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'				PROJ.	⌀	PART NO.	PH254H250-ST-L900D300-1x3P
					DIM TOL						TITLE:	2.54mm Pin Header Single Row Straight Dip Type