
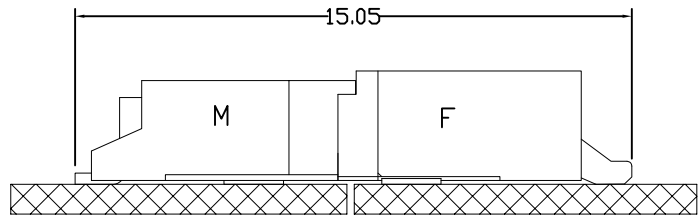


PCB LAYOUT

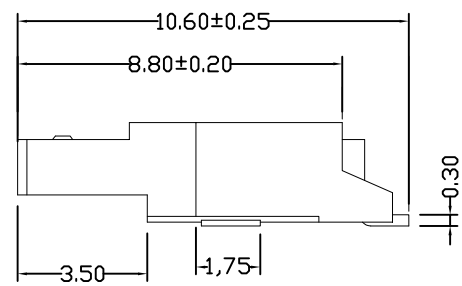

MATING VIEW

SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ min
 Temperature range: -25°C - +85
 Contact resistance: 40mΩ max

 Part No: 150BTB
 Material: LCP, UL94V-0
 Contact: Phosphor bronze, Tin plated
 Q' TY: 1,000PCS/Reel

Ordering Information

150BTB-MWR-03K2 S F 1 BE 182

F=Female
 M=Male
 Plating S=Tin Plated
 Material F=LCP
 Package 1=Tape&Reel
 Color BE=Beige

SCONDAR ELECTRONIC LIMITED
 ENGINEER LIU APPROVED

						OPERATION	DRAW	Zhong	2020.11.03	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky	2020.11.03	SIZE	A4	PART NO.	150BTB-MWR-03K2SF1BE182
0	05/12/27		NEW			30 ~ ±0.50	APPROVE			SHEET	1/1	TITLE:	BTB1.5mm 02Pin male SMT Right angle Header LCP V0 Beige Tin(Sn) Plating Tape and Reel MPQ=1.5KPCS
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 2' TOL				PROJ.			