


PCB LAYOUT

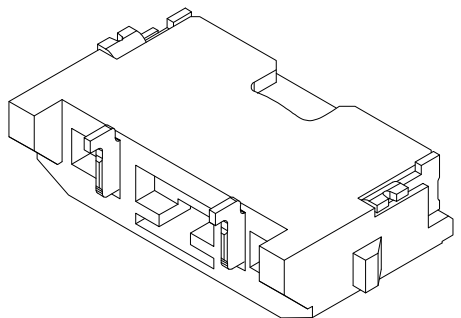

SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
- 2、 Voltage Rating: 300V AC, DC
- 3、 Temperatuer Range: -40°C ~ +105°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 1000MΩ Min
- 6、 Withstanding Voltang: 1700V AC/minute
- 7、 Material: Wafer LCP, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder tad Phosphoric bronze Tin-plated

Ordering Information

400BTB-FWR-02 S F 1 BE 182

F=Female
M=Male
Plating
S= Tin Plated
Material
F=LCP
Package
1= Tape&Reel
Color
BE=Beige

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

						OPERATION	DRAW	Zhong	2020.11.07	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30				SIZE	A4	PART NO.	400BTB-FWR-02SF1BE182
0	05/12/27		NEW			30 ~ ±0.50	CHECK	Micky	2020.11.07	SHEET	1/1	TITLE:	BTB4.0mm 02Pin Female SMT Right angle Header LCP V0 Beige Tin(Sn) Plating Tape and Reel MPQ=1KPCs
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	APPROVE			PROJ.			