





**SPECIFICATIONS**

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 150V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer LCP,UL94V-0  
PIN Phosphoric bronze Tin-plated  
Solder tads Phosphoric bronze Tin-plated

**Ordering Information**

**620BTB-MWR-02 S F 1 BE 182**

F=Female  
M=Male  
Plating  
S=Tin Plated  
Material  
F=LCP  
Package  
I=Tapc&Reel  
Color  
BE=Blue

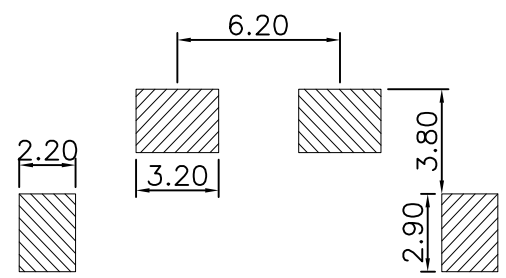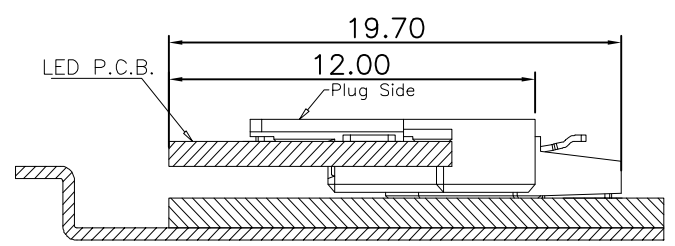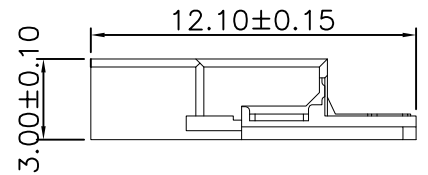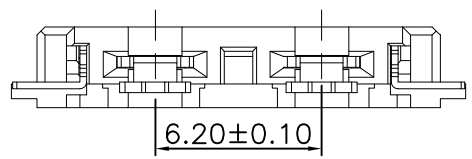

Mating Condition

PCB LAYOUT

**SCONDAR ELECTRONIC LIMITED**  
**ENGINEER LIU APPROVED**

						OPERATION	DRAW	Zhong	2020.11.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky	2020.11.06	SIZE	A4	PART NO.	620BTB-MWR-02SF1BL182
0	05/12/27		NEW			30 ~ ±0.50	APPROVE			SHEET	1/1	TITLE:	BTB6.2mm 02Pin male SMT Right angle Header LCP V0 Beige Tin(Sn) Plating Tape and Reel MPQ=1Kpcs
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM TOL				PROJ.			