
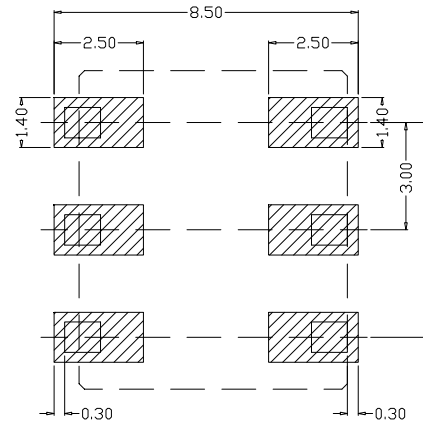
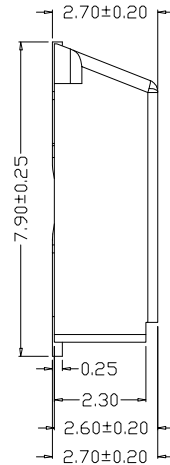
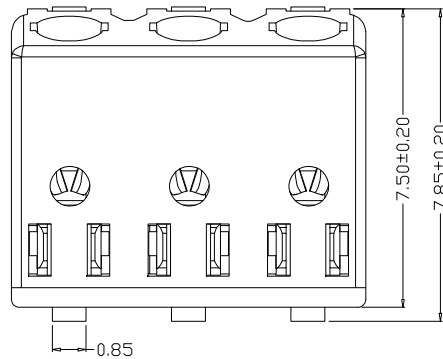
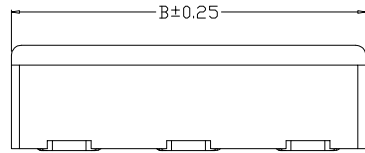


RoHS

SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
- 2、 Voltage Rating: 160V AC, DC
- 3、 Temperatuer Range: -40°C~+130°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 1000MΩ Min
- 6、 Withstanding Voltang: 1300V AC/minute
- 7、 Material: Wafer LCP, UL94V-0
PIN Phosphoric bronzes Tin-plated

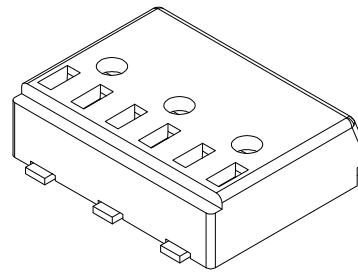


PCB LAYOUT

Ordering Information

SCT2059WRS - 30 -XX F 1 182

Series NO. Pitch=3.0 No. of Pins See Table Material F=LCP Package 0=PE Bag 1=tape & reel 2=tube 3=tray

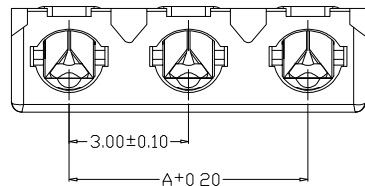

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

Dimensions		Part NO	PIN
A	B		
✓	5.80	SCT2059WRS30-01F1182	1
6.00	11.80	SCT2059WRS30-02F1182	2
12.00	17.80	SCT2059WRS30-03F1182	3

DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
DESIGN			UNIT	mm	
CHECK	Lisa	2020.08.02	SIZE	A4	
APPROVE	Allen	2020.08.02	SHEET	1/1	
			PART NO.	SCT2059WRS30-XXF1182	
			PROJ.	TITLE:	Terminal pitch3.0XL7.9mm SMT WR 01P BE LCP-V0 phosphor Bronze Tin(Sn) plated 24-28AWG