
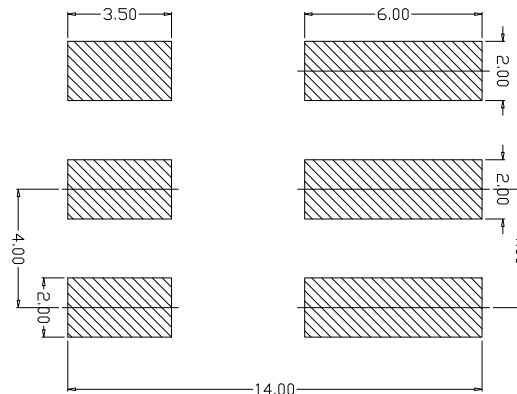
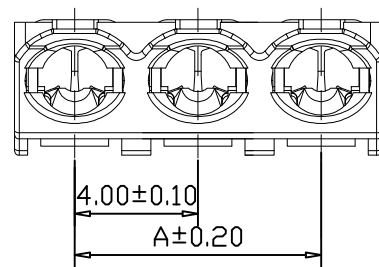


RoHS

SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
- 2、 Voltage Rating: 160V AC, DC
- 3、 Temperatuer Range: -40°C~+130°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 1000MΩ Min
- 6、 Withstanding Voltang: 1300V AC/minute
- 7、 Material: Wafer LCP, UL94V-0  
PIN Phosphoric bronzes Tin-plated

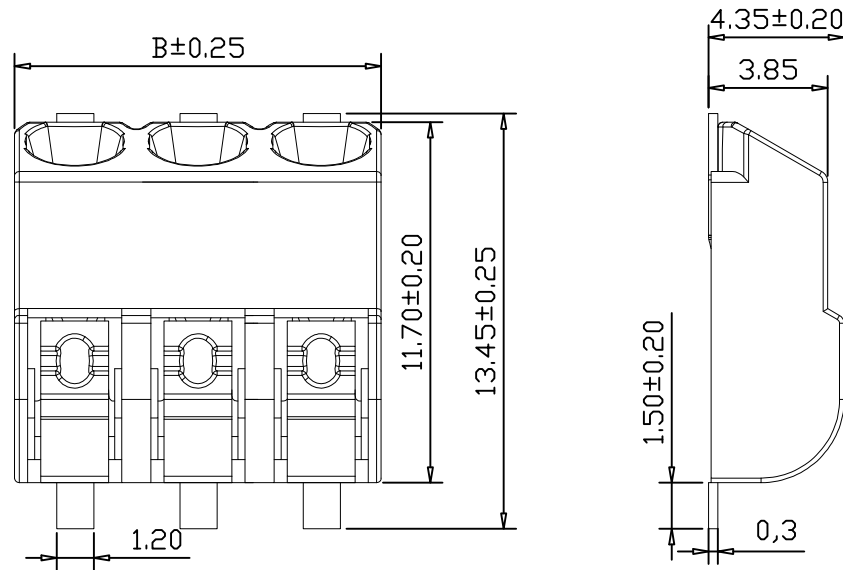


PCB LAYOUT

Ordering Information

SCT2060WRS - 40 -XX F 1 182

Series NO. Pitch=4.0 No.of Pins See Table Material F=LCP Package  
0=PE Bag  
1=tape & reel  
2=tube  
3=tray

Dimensions		Part NO	PIN
A	B		
4.00	8.00	SCT2060WRS40-02F1182	2
8.00	12.00	SCT2060WRS40-03F1182	3



SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
DESIGN			UNIT	mm	
CHECK	Lisa	2020.08.02	SIZE	A4	
APPROVE	Allen	2020.08.02	SHEET	1/1	PART NO. SCT2060WRS40-XXF1182
			PROJ.		TITLE: Terminal pitch: 0.1L11.7mm SMT WR Q2P BE LCP-V0 phosphor Bronze Tin(Sn) plated 22-28AWG