
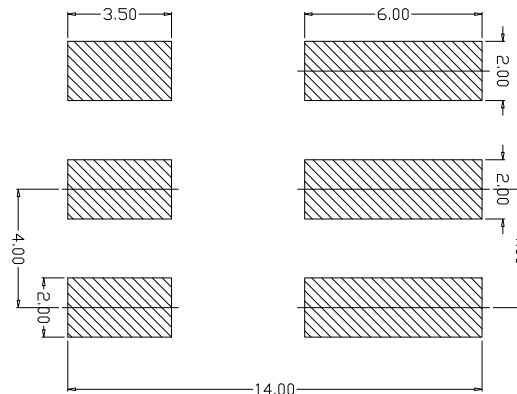
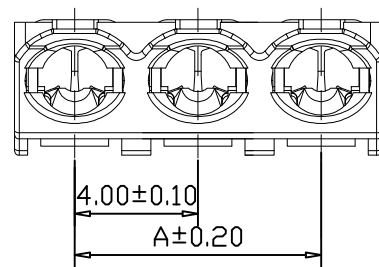


RoHS

SPECIFICATIONS

- 1、 Current Rating: 3A AC, DC
- 2、 Voltage Rating: 160V AC, DC
- 3、 Temperatuer Range: -40°C~+130°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 1000MΩ Min
- 6、 Withstanding Voltang: 1300V AC/minute
- 7、 Material: Wafer LCP, UL94V-0
PIN Phosphoric bronzes Tin-plated

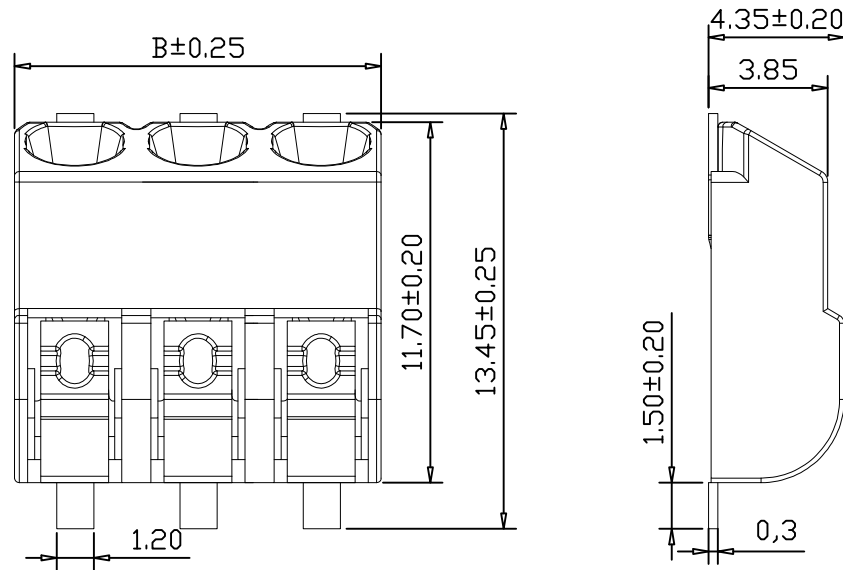


PCB LAYOUT

Ordering Information

SCT2060WRS - 40 -XX F 1 182

Series NO. Pitch=4.0 No.of Pins See Table Material F=LCP Package
0=PE Bag
1=tape & reel
2=tube
3=tray

| Dimensions | | Part NO | PIN |
|------------|-------|----------------------|-----|
| A | B | | |
| 4.00 | 8.00 | SCT2060WRS40-02F1182 | 2 |
| 8.00 | 12.00 | SCT2060WRS40-03F1182 | 3 |



SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

| | | | | | | |
|---------|-------|------------|-------|-----|----------|---|
| DRAW | Zhong | 2020.08.02 | SCALE | - | | |
| DESIGN | | | UNIT | mm | | |
| CHECK | Lisa | 2020.08.02 | SIZE | A4 | | |
| APPROVE | Allen | 2020.08.02 | SHEET | 1/1 | PART NO. | SCT2060WRS40-XXF1182 |
| | | | PROJ. | ☯ | TITLE: | Terminal pitch: 0.1L11.7mm SMT WR Q2P BE LCP-V0 phosphor Bronze Tin(Sn) plated 22-28AWG |

SCONDAR ELECTRONIC LIMITED