



RoHS

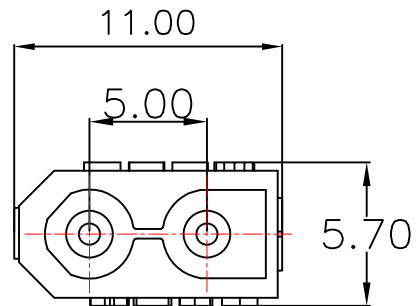


Specification

1. Rated value: DC500V 15A
2. Insulation resistance: $\geq 100\text{M}\Omega$
3. Contact resistance: $\leq 30\text{m}\Omega$
4. Withstand voltage: 500V AC
5. Service life: 1000 times
6. Operation Temperature:
-20°C to +105°C
7. Wire range: 18AWG
8. Main body Material:
PA6T 94-V0 orange
9. Pin Material : Brass
10. Plating: Gold

Ordering Information

SCTXT30 - F02G00G655

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION		DRAW	YAOL	2023.03.21	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35	DESIGN	ZHong	2023.03.21	UNIT	mm			
					X.XX	±0.25				SIZE	A4			
					X.XXX	±0.15	CHECK	LisaL	2023.03.22	SHEET	1/1			PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM	± 3° TOL	APPROVE			PROJ.		TITLE:	XT30 PH5.0mm 02P ST 15A PA66 V0 Brass Gold plated for 18AWG battery Male socket