
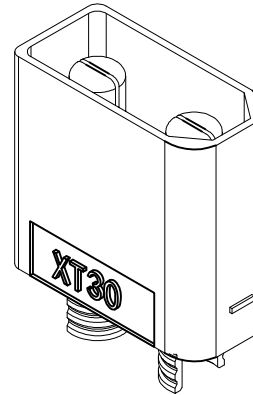


RoHS



Specification

1. Rated value: DC500V 15A
2. Insulation resistance: $\geq 100M\Omega$
3. Contact resistance: $\leq 30M\Omega$
4. Withstand voltage: 500V AC
5. Service life: 1000 times
6. Operation Temperature: -20°C to $+105^{\circ}\text{C}$
7. Wire range: 18AWG
8. Main body Material: PA6T 94-V0 orange
9. Pin Material: Brass
10. Plating: Gold

Ordering Information

SCTXT30- M02G0OG655

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION		DRAW	YAOL	2023.03.21	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X	± 0.35	DESIGN	ZHong	2023.03.21	UNIT	mm		
					X.XX	± 0.25				SIZE	A4		
					X.XXX	± 0.15				SHEET	1/1		
AO	2021.03.03	NEW			Angle	$\pm 3^{\circ}$	CHECK	LisaL	2023.03.22	PART NO.		SCTXT30-M02G0OG-655	
REV	DATE	MODIFICATION DESCRIPTION			DIM	TOL				PROJ.		TITLE:	XT30 PH5.0mm 02P ST 15A PA66 V0 Brass Gold plated for 18AWG battery Female socket