
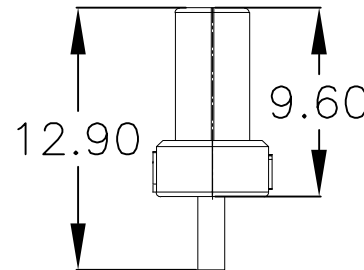
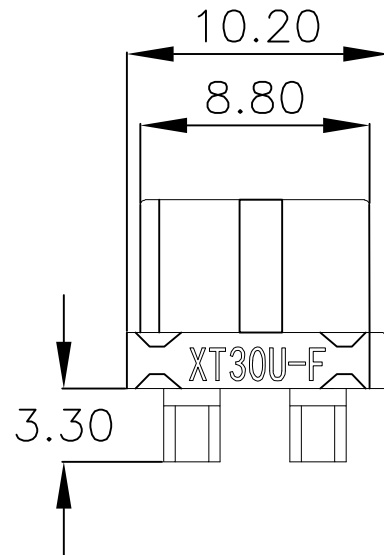



RoHS

Specification

1. Rated value:DC500V 15A
2. Insulation resistance: $\geq 100M\Omega$
3. Contact resistance: $\leq 30M\Omega$
4. Withstand voltage:500V AC
5. Service life:1000 times
6. Operation Temperature:
-20℃ to +105℃
7. Wire range: 18AWG
8. Main body Material:
PA6T 94-V0 orange
9. Pin Material : Brass
- 10.Plating: Gold

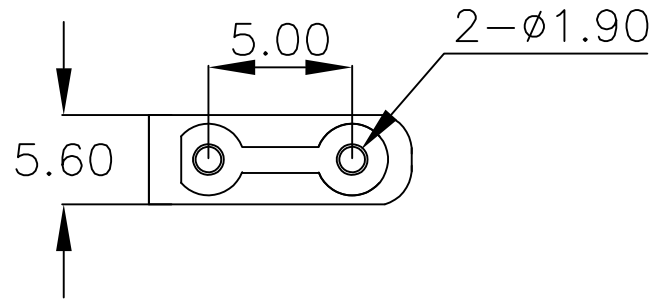

Ordering Information

SCTXT30U - F02G0OG-655

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION		DRAW	YAOL	2023.03.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35	DESIGN	ZHong	2023.03.16	UNIT	mm			
					X.XX	±0.25				SIZE	A4			
					X.XXX	±0.15				CHECK	LisaL			2023.03.16
AO	2021.03.03	NEW		—	—	Angle	± 3°	APPROVE			PROJ.		TITLE:	XT30U PH5.0mm 02P ST 15A PA6T V0 Brass Gold plated for 18AWG battery Female socket
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL							