
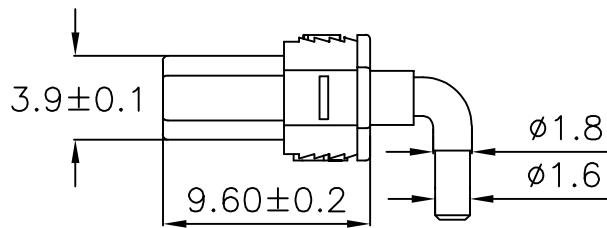

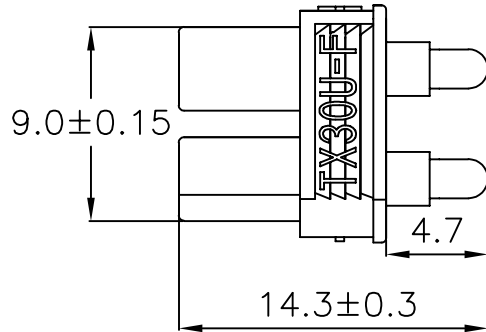



RoHS

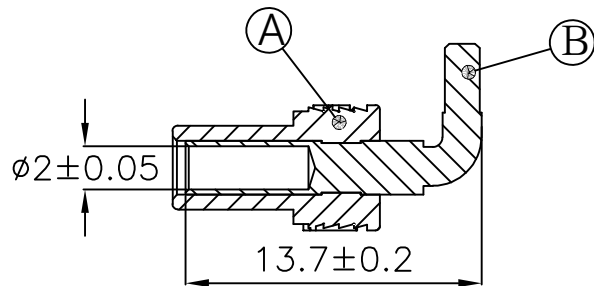

Specification

1. Rated value: DC500V 15A
2. Contact resistance: 0.80M Ω
3. Cable SPEC: PCB
4. Service life: 1000 times
5. Operation Temperature: -20 $^{\circ}$ C to +120 $^{\circ}$ C
6. Main body Material: PA66 94-V0 orange
7. Pin Material : 2.0 Male 2.5X18.20
8. Plating: Gold

Ordering Information

SCTXT30WR -F02 B 0 OG-655

Female Material: B=PA66 Package 0=PE Bag Color OG=Orange

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

B	2.0Female2.5X17.3 5 Gold 90°	Gold	2pcs
A	TX30U-F	Golden Yellow	1pcs
NO.	MATERIAL NAME	FINISH	QUANTITY

					OPERATION		DRAW	YAOL	2023.03.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN	ZHong	2023.03.16	UNIT	mm		
					X.XX	±0.25				SIZE	A4		
AO	2021.03.03	NEW	——	——	X.XXX	±0.15	CHECK	LisaL	2023.03.16	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE			PROJ.		TITLE:	XT30PW PH5.1mm 02P 90° PA66 UL94—V0 Gold plated for battery Female socket
					DIM	TOL							