

RoHS


Specification

1. Rated value: DC500V 15A
2. Contact resistance: $0.80\text{M}\Omega$
3. Cable SPEC: PCB
4. Service life: 1000 times
5. Operation Temperature: -20°C to $+120^{\circ}\text{C}$
6. Main body Material: PA66 94-V0 orange
7. Pin Material : 2.0 Male 2.5X18.20
8. Plating: Gold

Ordering Information

SCTXT30WR -M02 B 0 OG-655

Male Material: B=PA66 Package 0=PE Bag Color OG=Orange

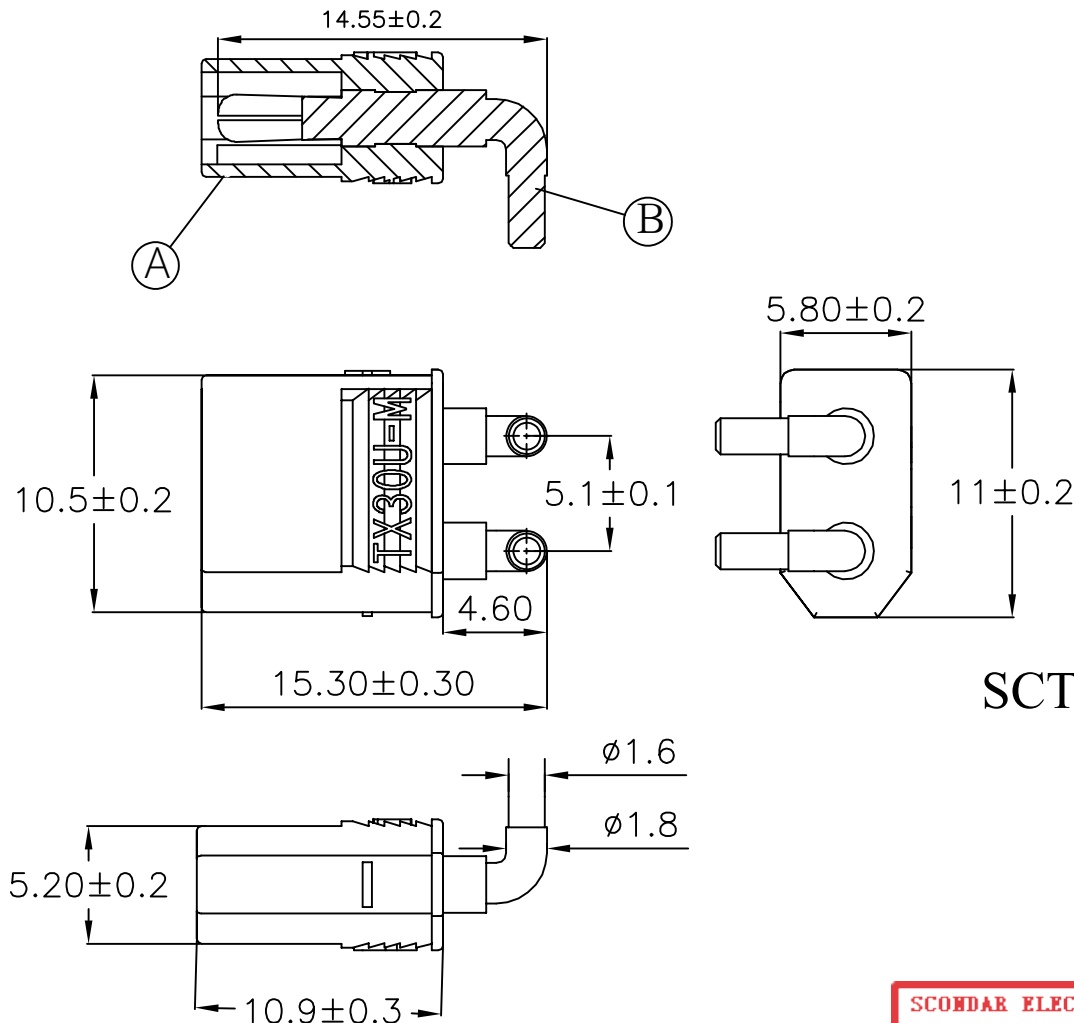

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

B	2.0Male2.5X18.2 Gold (TX30-U90°)	Gold	2pcs
A	TX30U-M	Golden Yellow	1pcs
NO.	MATERIAL NAME	FINISH	QUANTITY

				OPERATION		DRAW	YAOL	2023.03.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
				X.X	±0.35	DESIGN	ZHong	2023.03.16	UNIT	mm		
				X.XX	±0.25				SIZE	A4		
				X.XXX	±0.15				SHEET	1/1		
AO	2021.03.03	NEW		Angle	± 3'	CHECK	LisaL	2023.03.16			PART NO.	SCTXT30WR-M02B00G655
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			PROJ.	TITLE:	XT30PW PH5.1mm 02P 90° PA66 UL94-V0 Gold plated for battery Male socket	