




RoHS

受控

SPECIFICATION:
 -Current Rating: 1.0Amps
 -Insulation Resistance: 1000MΩ Min
 -Contact Resistance:20mΩ Max
 -Withstanding Voltage: 500VAC(1Min)
 -Max Processing Temp:230°-260° for 30-60 seconds
 -Operation Temperature: -40°C to +105°C
Material:
 -Insulator (Housing):PA6T (UL94V-0)
 -Black Contacts:Phosphor bronze

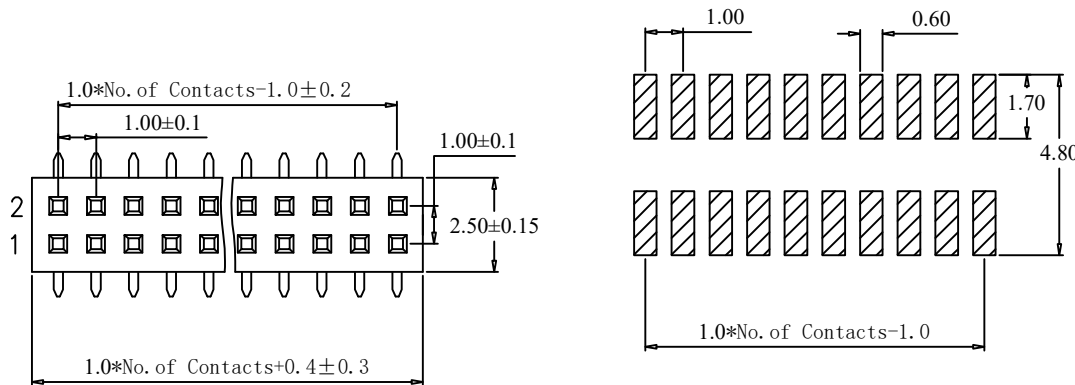

P.C.B Layout

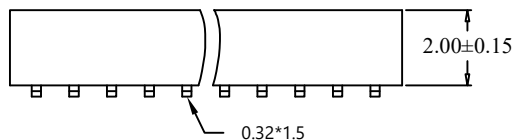

Ordering Information

FH100H200SMT - 2xx G A 1 301

Insulator height
200=2.00mm


No. of Pins
220=2x20PIN

Plating
G=Gold Plated
T=Tin Plated
G2=Gold 2u"
G10=Gold 10u"

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	Yang	2017.07.08	SCALE	-	 SCONDAR ELECTRONIC LIMITED
X.X ±0.35	DESIGN			UNIT	mm	
X.XX ±0.25	CHECK	Lisa	2017.07.08	SIZE	A4	
X.XXX ±0.15	APPROVE			SHEET	1/1	PART NO. FH100H200SMT-2xxGA1301
Angle ± 3°				PROJ.	⌀	TITLE: FH1.0 SMT H2.0 Gold flash PA6T 2xxP Female header With pole
DIM TOL						

AO	2021.03.06	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE