



RoHS

受控

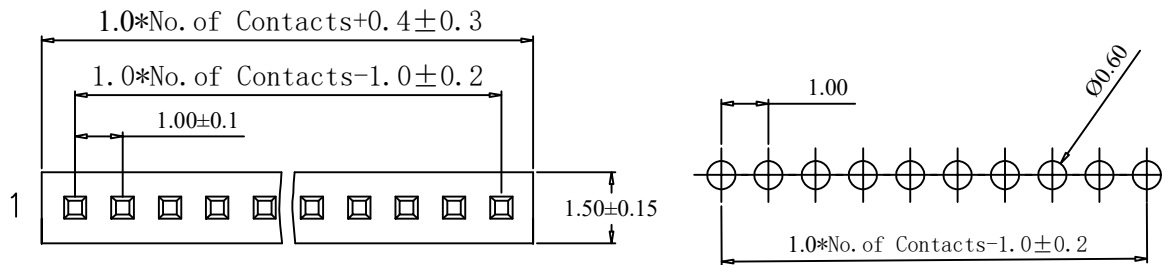

P.C.B Layout

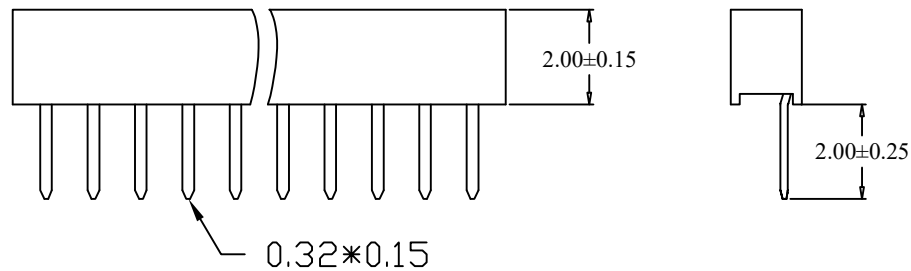

SPECIFICATION:

- Current Rating: 1.0Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance:20mΩ Max
  - Withstanding Voltage: 500VAC(1Min)
  - Max Processing Temp:230°-260°for 30-60 seconds
  - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
  - Black Contacts:Phosphor bronze

Ordering Information

FH100H200ST-1xx G A 0 301

Insulator height 200=2.00mm    No.of Pins 20=20PIN    Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"    Material A=PA6T    Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

SCONDAR ELECTRONIC LTD  
 ENGINEER LIU APPROVED

|     |            |  |                          |        |             |         |      |            |       |     |                                |  |
|-----|------------|--|--------------------------|--------|-------------|---------|------|------------|-------|-----|--------------------------------|--|
|     |            |  |                          |        | OPERATION   | DRAW    | Yao  | 2017.07.09 | SCALE | -   | <br>SCONDAR ELECTRONIC LIMITED |  |
|     |            |  |                          |        | X.X ±0.35   | DESIGN  |      |            | UNIT  | mm  |                                |  |
|     |            |  |                          |        | X.XX ±0.25  |         |      |            | SIZE  | A4  |                                |  |
|     |            |  |                          |        | X.XXX ±0.15 | CHECK   | Lisa | 2017.07.09 | SHEET | 1/1 |                                | PART NO.   |
| AO  | 2010.03.06 |  | NEW                      |        | Angle ± 3'  | APPROVE |      |            | PROJ. | ⊕   | TITLE:                         | FH1.0 ST H2.0 Gold flash PA6T 1xxP Female header |
| REV | DATE       |  | MODIFICATION DESCRIPTION | CHANGE | DIM TOL     |         |      |            |       |     |                                |  |