
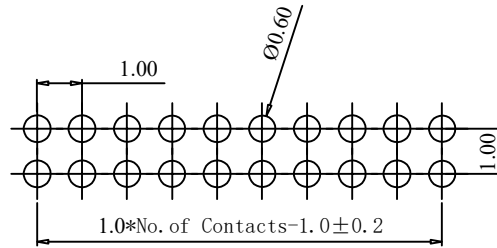


RoHS



受控

SPECIFICATION:

- Current Rating: 1.0Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp:230°-260°for 30-60 seconds
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Black Contacts:Phosphor bronze

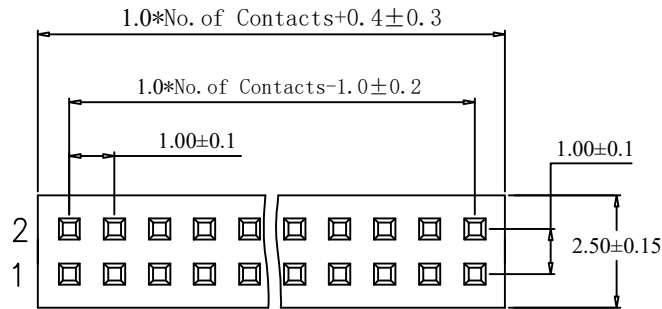

P.C.B Layout

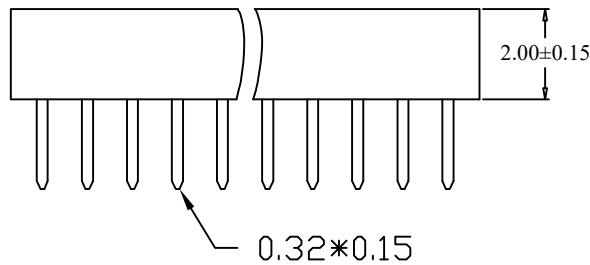


Ordering Information

FH100H200ST-2xx G A 2 301

Insulator height 200=2.00mm
 No.of Pins 210=2X10PIN
 Plating G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

					OPERATION	DRAW	Yao	2017.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1	PART NO.	FH100H200ST-2xxGA2301
AO	2021.03.06		NEW		Angle	± 3'			PROJ.	⌀	TITLE:	FH1.0 ST H2.0 Gold flash PA6T 2xxP Female header
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE				