
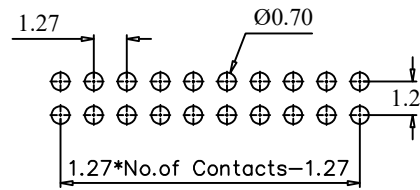


RoHS



受控

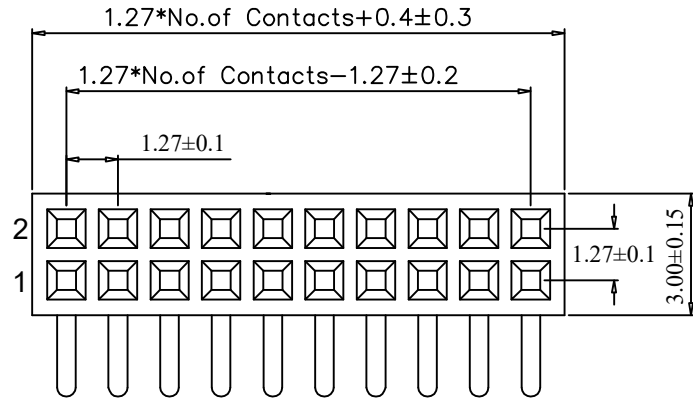

P.C.B Layout

SPECIFICATION:

- Current Rating: 1.0Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp:230°-260°for 30-60 seconds
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Phosphor bronze
 - Contact Plated:Gold Plated
Tin Plated

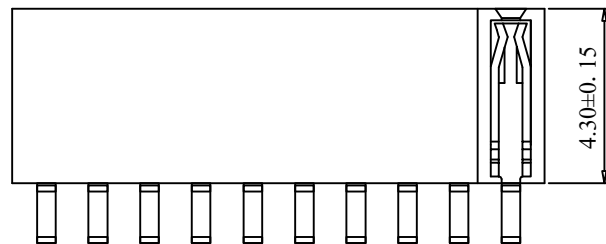


Ordering Information

FH127H430RT-2xx G A 0 301

Insulator height 430=4.30mm
 No. of Pins 220=2x20PIN
 Plating G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

					OPERATION	DRAW	SIMON	2010.03.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25	DESIGN	Lyao	2010.03.03	SIZE		A4
					X.XXX	±0.15	CHECK	Lisa	2010.03.06	SHEET		1/1
AO	2021.03.16		NEW		Angle	± 3'			PART NO.		FH127H430RT-2xxGA0301	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.	TITLE:	FH1.27mm Female Header 2XXP Right Angle Dip Type	