



RoHS

受控

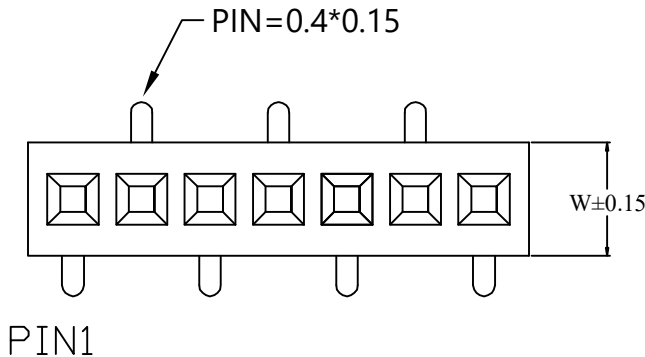

TYPE B

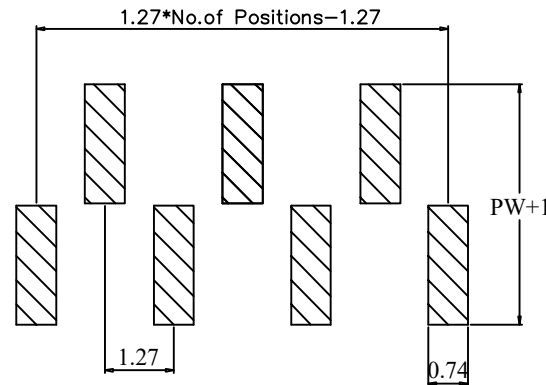

P.C.B Layout

SPECIFICATION:

- Current Rating: 1.0Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60S
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated
Tin Plated

Ordering Information

FH127HxxxSMT -1xx G A 1 301 B

200=2.00mm
 340=3.40mm
 430=4.30mm



No. of Pins
 120=1x20PIN

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

A=PCB layout type A
 B=PCB layout type B

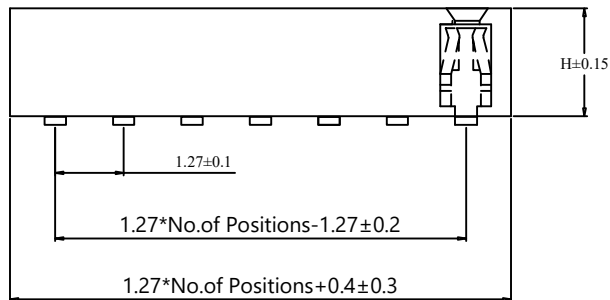

H	W	PW	L	PIN
2.00	2.10	3.60	2.20	0.4*0.15
3.40	2.10	3.80	3.60	0.4*0.15
4.30	2.10	3.80	4.60	0.4*0.15

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

					OPERATION	DRAW	SIMON	2016.04.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN	LYao	2016.04.11	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2016.04.13	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
AO	2021.03.06	NEW			Angle	± 3'				PART NO.	FH127HxxxSMT-1xxGA1301B	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	TITLE:	FH1.27mm Female Header 1XXP Straight SMT Type PCB layout type B	