

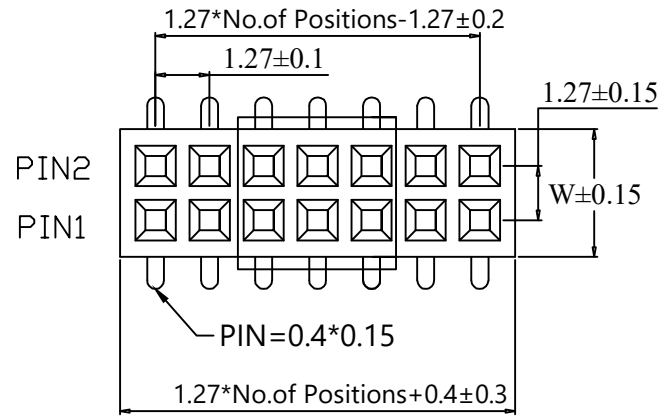


RoHS

受控



P.C.B Layout

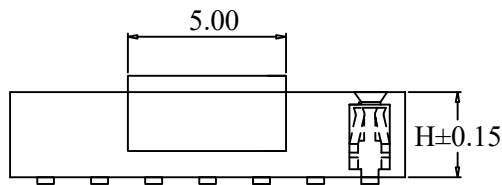

SPECIFICATION:

- Current Rating: 1.0Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 30-60s
- Operation Temperature: -40°C to +105°C
- Material:
 - Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated
Tin Plated

Ordering Information

FH127HxxxSMT -2xx G A 1 301

200=2.00mm
 340=3.40mm
 430=4.30mm

No.of Pins
 220=2x20PIN

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2μ"
 G10=Gold 10μ"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

H	W	PW	L	PIN
2.00	3.00	4.50	2.20	0.4*0.15
2.00	3.00	4.60	2.20	0.4*0.15
3.40	3.00	4.80	3.60	0.46*0.15
4.30	3.00	4.80	4.60	0.46*0.15

SCONDAR ELECTRONIC LTD
ENGINEER LJU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SIMON	2016.04.12	SCALE	-	
AO	2021.03.13	NEW			X.X	±0.35	DESIGN	Lyao	2016.04.13	UNIT	mm
					X.XX	±0.25	CHECK	Lisa	2016.04.15	SIZE	A4
					X.XXX	±0.15	APPROVE			SHEET	1/1
					Angle	± 3'				PROJ.	☉
					DIM	TOL				TITLE:	FH1.27mm Female Header 2XXP Straight SMT Type

SCONDAR ELECTRONIC LIMITED

PART NO. FH127HxxxSMT-2xxGA1301