
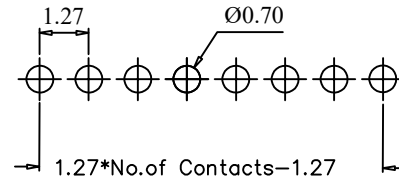




RoHS

受控

SPECIFICATION:
 -Current Rating: 1.0Amps
 -Insulation Resistance: 1000MΩ Min
 -Contact Resistance:20mΩ Max
 -Withstanding Voltage: 500VAC(1Min)
 -Max Processing Temp:230°-260°for 30-60 seconds
 -Operation Temperature: -40°C to +105°C
Material:
 -Insulator (Housing):PA6T (UL94V-0)
 -Contacts:Phosphor bronze
 -Contact Plated:Gold Plated
 Tin Plated

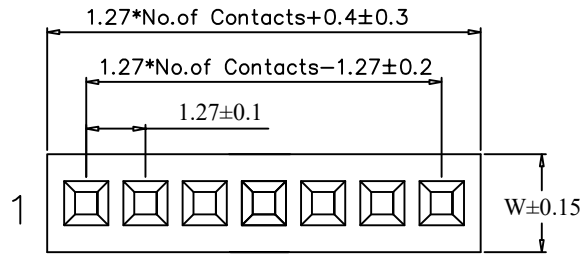

P.C.B Layout

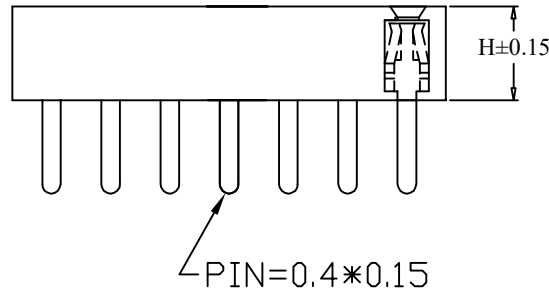

Ordering Information

FH127HxxxST-1xx G A 2 301

200=2.00mm
 340=3.40mm
 430=4.30mm

No.of Pins
 120=1x20PIN

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

H	W	PC	PIN
2.00	2.10	2.00	0.40*0.15
3.40	2.10	2.40	0.46*0.15
4.30	2.10	2.40	0.46*0.15

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

					OPERATION	DRAW	Yang	2010.03.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
AO	2017.06.06	NEW			Angle	± 3'			PART NO.	FH127HxxxST-1xxGA2301	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	TITLE:	FH1.27 ST Gold flash PA6T 1xxP Female header