


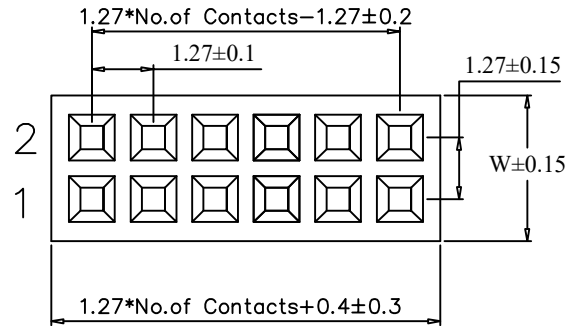


RoHS

受控



P.C.B Layout

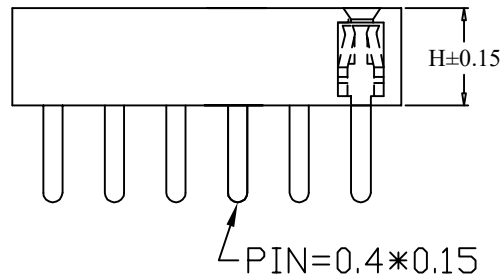

SPECIFICATION:

- Current Rating: 1.0Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60 seconds
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Phosphor bronze
 - Contact Plated: Gold Plated
Tin Plated

Ordering Information

FH127HxxxST-2xx G A 2 301

200=2.00mm
340=3.40mm
430=4.30mm

No. of Pins
220=2x20PIN

Plating
G=Gold Plated
T=Tin Plated
G2=Gold 2u"
G10=Gold 10u"

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

H	W	PC	PIN
2.00	3.00	2.00	0.40*0.15
3.40	3.00	2.40	0.46*0.15
4.30	3.00	2.40	0.46*0.15

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	SIMON	2010.03.06
X.X ±0.35	DESIGN	Lyao	2010.03.06
X.XX ±0.25			
X.XXX ±0.15	CHECK	MICKY	2010.03.06
Angle ± 3'	APPROVE		
DIM TOL			

SCONDAR ELECTRONIC LIMITED

SCALE: -

UNIT: mm

SIZE: A4

SHEET: 1/1

PART NO.: FH127HxxxST-2xxGA2301

PROJ. TITLE: FH1.27 ST Gold flash PA6T 2xxP Female header

AO	2017.06.06	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE