
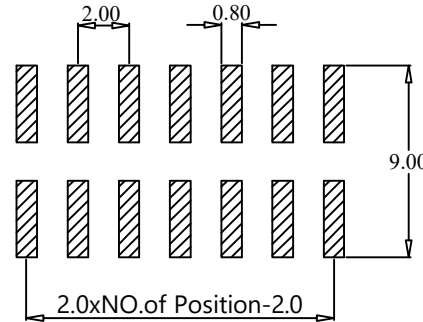


RoHS



受控

**SPECIFICATION:**

- Current Rating: 1.5Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance: 20mΩ Max
  - Withstanding Voltage: 500VAC(1Min)
  - Max Processing Temp: 230°-260° for 30-60s
  - Operation Temperature: -40℃ to +105℃
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
  - Black Contacts: Brass

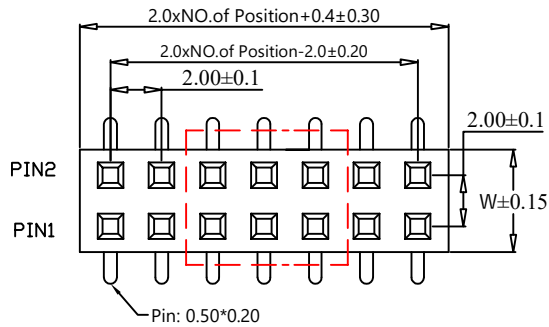

P.C.B Layout

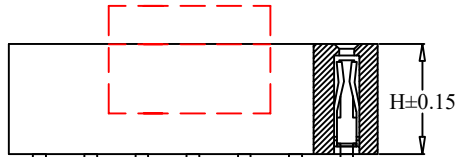

**Ordering Information**

FH200HxxxSMT -2xx Wxxx G A 1 301

200=2.00mm  
 340=3.40mm  
 430=4.30mm

No. of Pins  
 220=2x20PIN

400=4.00  
 450=4.50

Plating  
 G=Gold Plated  
 T=Tin Plated  
 G2=Gold 2μ"  
 G10=Gold 10μ"

Material  
 A=PA6T

Package  
 0=PE Bag  
 1=Tape&Reel  
 2=Tube  
 3=Tray

H	W	PW	L
2.20	4.00	6.30	2.50
4.00	4.00	6.50	4.30
4.00	4.50	6.50	4.30
4.30	4.00	6.50	4.60
4.30	4.50	6.50	4.60
4.60	4.00	6.50	4.90
4.60	4.50	6.50	4.90

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

AO	2021.06.18	NEW			OPERATION	DRAW	LYao	2016.05.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1	PART NO.	FH200HxxxSMT-2xxWxxxGA1301
					Angle	± 3'			PROJ.	☉	TITLE:	FH2.0 SMT Gold flash PA6T 2xxP Female header With pole
					DIM	TOL						