

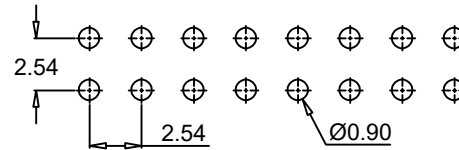
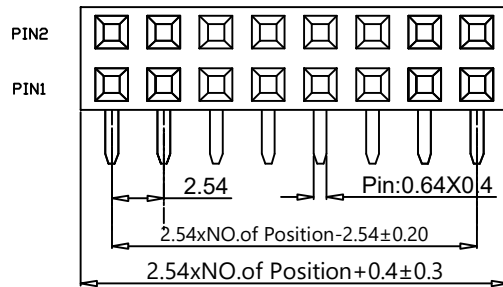


RoHS

受控

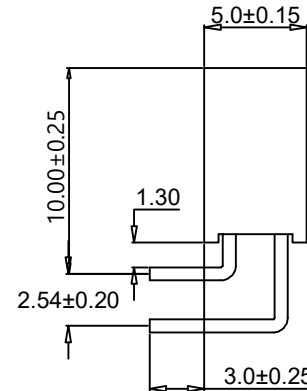

PCB LAYOUT

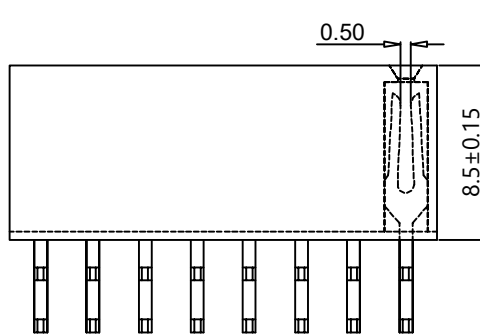

SPECIFICATION:

- Current Rating: 3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 30-60s
- Operation Temperature: -40℃ to +105℃
- Material:
- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated: Gold Plated or Tin Plated

Ordering Information

FH254H850 RT-2xx G A 3 301

Insulator height 850=8.50mm
 No.of Pins 220=2x20PIN
 Plating G=Gold Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list			
H	W	PC	PIN
8.50	5.00	3.00	0.64*0.4

SCONDR ELECTRONIC LTD
ENGINEER LIU APPROVED

					OPERATION	DRAW	LYao	2016.04.12	SCALE	-	 SCONDR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2016.04.15	SHEET	1/1		
AO	2021.03.06		NEW		Angle	± 3'			PROJ.	⊕ ↖	PART NO.	FH254H850RT-2xxGA3301
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE			TITLE:	FH2.54 RT Gold flash PA6T 2xxP Female header