
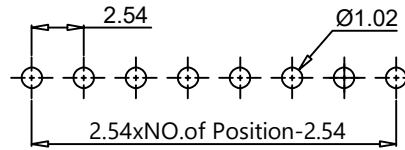


RoHS



受控

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated or Tin Plated

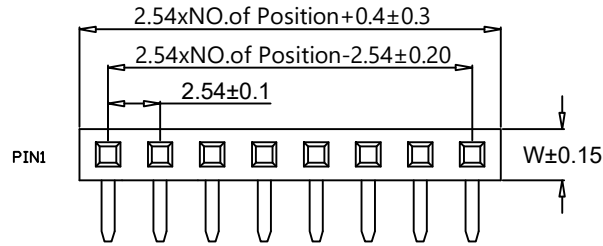

PCB LAYOUT

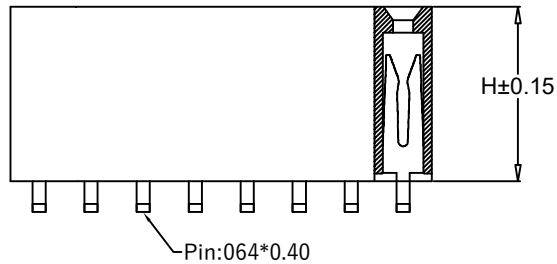


Ordering Information

FH254Hxxx RT-1xx G A 3 301

Insulator height: 570=5.70mm, 850=8.50mm
 No. of Pins: 120=1x20PIN
 Plating: G=Gold Plated
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list			
H	W	PC	L
5.70	2.40	3.00	6.20
8.50	2.50	3.00	10.00

		SCONDAR ELECTRONIC LTD ENGINEER LIU APPROVED		OPERATION		DRAW	LYao	2016.04.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
				X.X	±0.35	DESIGN			UNIT	mm	
				X.XX	±0.25		CHECK	Lisa	2016.04.13	SIZE	
AO	2021.03.06	NEW				APPROVE			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE			PROJ.	⊕	TITLE: FH2.54 RT Gold flash PA6T 1xxP Female header