

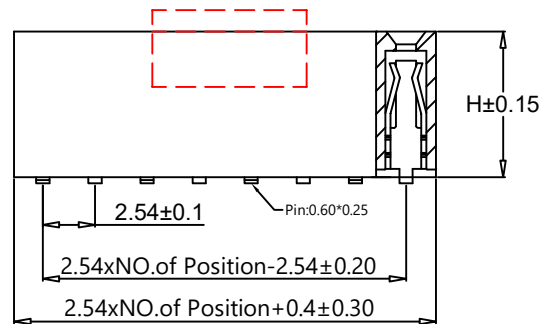
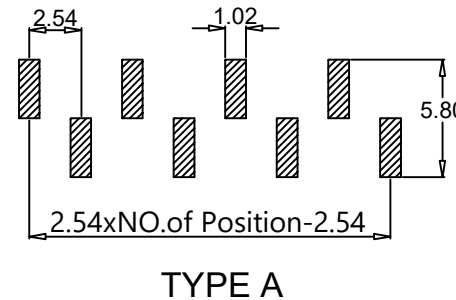


RoHS

受控

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated or Tin Plated

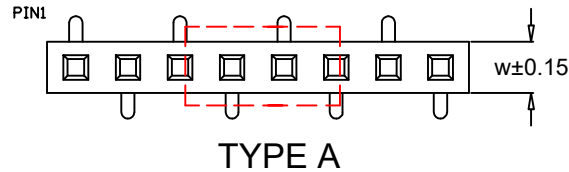

Ordering Information

FH254Hxxx SMT-1xx G A 1 301 A - U

Insulator height: 350=3.50mm, 500=5.00mm, 710=7.10mm, 850=8.50mm
 No. of Pins: 120=1x20PIN
 Plating: G=Gold Plated
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray
 A=PCB layout type A, B=PCB layout type B
 Contact: Y=Y shape, U=U shape

H	W	PW	L	PIN
3.50	2.40	4.40	3.90	0.55*0.25
5.00	2.40	4.40	5.00	0.60*0.25
7.10	2.50	4.80	7.50	0.60*0.25
8.50	2.50	4.80	8.90	0.60*0.25

SCONDAR ELECTRONIC LTD
ENGINEER LJU APPROVED

					OPERATION	DRAW	LYao	2017.03.23	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2017.03.24	SHEET	1/1	
AO	2021.05.12	NEW			Angle	± 3°	Lisa		PART NO.	FH254HxxxSMT-1xxGA1301AU	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	 TITLE:	FH2.54 1XXPin SMT Female Header PCB layout type A