
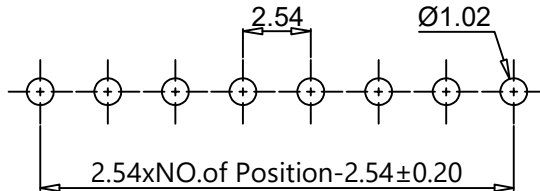


RoHS



受控

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp:230°-260°for 30-60s
 - Operation Temperature: -40℃ to +105℃
- Material:
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated: Gold Plated or Tin Plated

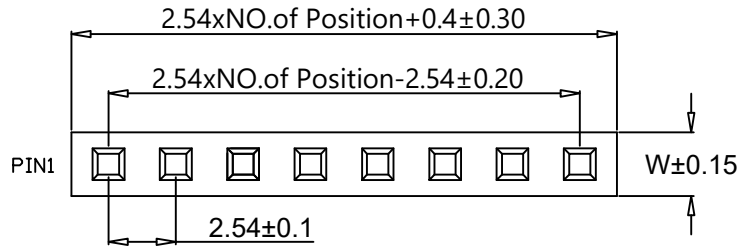

PCB LAYOUT

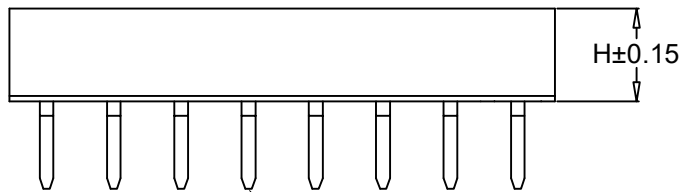

Pin: 0.6*0.25

Ordering Information

FH254H xxx ST-1xx G A 0 301 U

Insulator height: 350=3.50mm, 500=5.00mm, 680=6.80mm, 710=7.10mm, 850=8.50mm
 No. of Pins: 120=1x20PIN
 Plating: G=Gold Plated
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray
 Contact: Y=Y shape, U=U shape

H	W	PC	PIN
3.50	2.40	3.30	0.60*0.25
5.00	2.50	3.00	0.60*0.25
6.80	3.50	3.30	0.7*0.20
7.10	2.50	3.20	0.60*0.25
8.50	2.50	3.20	0.60*0.25

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2010.03.06	NEW			OPERATION	DRAW	Yang	2021.04.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.04.12	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	PART NO.	FH254HxxxST-1xxGA0301U
					DIM	TOL	APPROVE			⊕	TITLE:	FH2.54 ST Gold flash PA6T 1xxP Female header